



CONVECTION
OVENS

INNOVATION
DESIGN
SIMPLICITY
PERFORMANCE
QUALITY
EFFICIENCY
VALUE



SIMPLICITY

Smart and ergonomic controls provide the operator with intuitive ease of use.

Digital series

Intuitive button with digital displays and full programs permit you to control all cooking processes with extraordinary results.

Manual series

Elegant manual controls that emphasize simplicity and operation.




DYNAMIC DISTRIBUTION

Perfect temperature control, dynamic distribution air circulation system with "reversing fans" thanks to an innovative chamber design and a revolutionary 6-blade fan.



AIR SPEED REGULATION

To achieve incredible performance even with the most delicate recipe creation.

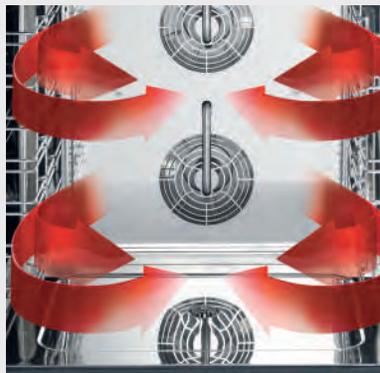

DIRECT STEAM INJECTION

The steam solutions that we integrate are most effective as a result of their speed; and always hygienic while the steam is generated gently and not dry.



QUALITY

Every AXIS oven is tested for complete and accurate performance before it can be prepared for final packing. This only assures the proud owner of the highest standards they can expect from this product for many years to come.



Easily removable gasket without the use of tools.



High efficiency ventilation

With our double pane glass door system and heat-reflective coating, we can fully guarantee a low temperature contact on the exterior, and ease of cleaning.



SPACE

Create an enhanced workspace with our double oven stacking feature. Replace the traditional cooking ovens, grills, and various table-top appliances with our stackable solution.



Accessories

Full range of accessories and cooking solutions to provide the best tools for hot food preparation.





AX-513

Half Size Convection Oven Manual controls - 3 shelves



NEMA 5-15



Intertek



Intertek



Manual controls	Time, temperature	Features
Load capacity	3 shelves for half size sheet pans	• Advanced airflow design
Fan	1 (2200 rpm)	• Manual control: 120 minute timer or continuous ON
Space between shelves	3" (75 mm)	• Interior halogen light
Power requirements	1,500 Watts / 120 V / 60 / 1 Oven supplied with power cord and plug	• Heavy duty stainless steel body construction
Temperature	86° - 540° F	• "Cold Door" design with double pane glass
Equipped with	120 minute timer - Signal at end of cycle	• Reinforced door hinges
Cavity size (inches)	18.7" x 15.9" x 9.6" (WxDxH)	• Oven door can support weight limit of 60 lbs.
Unit dimensions (inches)	22.05" x 25.48" x 17.90" (WxDxH)	• Oven cavity is insulated with ultra-high temperature fiberglass insulation
Shipping dimensions (inches)	23.63" x 26.77" x 19.69" (WxDxH)	• 3 Stainless steel wire shelves included
Net / Ship weight	58 lb / 68 lb	• Warranty: 2 year parts & 1 year labor exclusive of lights, gaskets and glass (60 days)
		• Ovens can be staked (kit required)



AX-513RH

**Half Size Convection Oven with Humidity
Manual Controls - Reversing Fan - 3 shelves**



NEMA 5-15



Intertek



Intertek



Manual controls	Time, temperature, humidity	Features <ul style="list-style-type: none"> • Advanced airflow design • Automatic high speed reversing fan • Manual control: 120 minute timer or continuous ON • Interior halogen light • Includes electro valve for direct water connection • Micro safety switch shuts oven off when door is open • Heavy duty stainless steel body construction • “Cold Door” design with double pane glass • Reinforced door hinges • Oven door can support weight limit of 80 lbs. • Oven cavity is insulated with ultra-high temperature fiberglass insulation • 3 Stainless steel wire shelves included • Ovens can be stacked (kit required) • Warranty: 2 year parts & 1 year labor exclusive of lights, gaskets and glass (60 days) • Ovens can be staked (kit required)
Load capacity	3 shelves for half size sheet pans	
High speed reversing fan	1 (3200 rpm)	
Space between shelves	3" (75 mm)	
Power requirements	1,650 Watts / 120 V / 60 / 1 Oven supplied with power cord and plug	
Temperature	86° - 540° F	
Equipped with	120 minute timer - Signal at end of cycle	
Cavity size (inches)	18.7"x15"x9.6" (WxDxH)	
Unit dimensions (inches)	22.05" x 25.48" x 17.90" (WxDxH)	
Shipping dimensions (inches)	23.63" x 26.77" x 19.69" (WxDxH)	
Net / Ship weight	62 lb / 73 lb	



AX-513RHD

**Half Size Convection Oven with Humidity
Digital controls - Reversing Fan - 3 shelves**



NEMA 5-15



Intertek



Intertek



Digital controls	Time, temperature, humidity, 3 cooking cycles for each program, automatic pre-heating
Load capacity	3 shelves for half size sheet pans
High speed reversing fan	1 (3200 rpm)
Space between shelves	3" (75 mm)
Power requirements	1,650 Watts / 120 V / 60 / 1 Oven supplied with power cord and plug
Temperature	86° - 500° F
Equipped with	16 hour timer - Signal at end of cycle
Cavity size(inches)	18.7" x 15" x 9.6" (WxDxH)
Unit dimensions (inches)	22.05" x 25.48" x 17.90" (WxDxH)
Shipping dimensions (inches)	23.63" x 26.77" x 19.69" (WxDxH)
Net / Ship weight	62 lb / 73 lb

Features

- Advanced airflow design
- Automatic high speed reversing fan
- Digital programmable controls / 99 programs / automatic pre-heating / 3 cooking cycles for each program
- Interior halogen light
- Includes electro valve for direct water connection
- Micro safety switch shuts oven off when door is open
- Heavy duty stainless steel body construction
- "Cold Door" design with double pane glass
- Reinforced door hinges
- Oven door can support weight limit of 80 lbs.
- Oven cavity is insulated with ultra-high temperature fiberglass insulation
- 3 Stainless steel wire shelves included
- Ovens can be stacked (kit required)
- Warranty: 2 year parts & 1 year labor exclusive of lights, gaskets and glass (60 days)
- Ovens can be staked (kit required)



AX-514

Half Size Convection Oven Manual controls - 4 shelves



NEMA 6-20



Intertek



Intertek



Manual controls	Time, temperature
Load capacity	4 shelves for half size sheet pans
Fan	1 (2200 rpm)
Space between shelves	3" (75 mm)
Power requirements	2,700 Watts / 208-240 V / 60 / 1 Oven supplied with power cord and plug
Temperature	86° - 540° F
Equipped with	120 minute timer - Signal at end of cycle
Cavity size (inches)	18.7" x 15.9" x 12.6" (WxDxH)
Unit dimensions (inches)	22.05" x 25.48" x 20.85" (WxDxH)
Shipping dimensions (inches)	23.63" x 26.77" x 21.65" (WxDxH)
Net / Ship weight	69 lb / 75 lb

Features

- Advanced airflow design
- Manual control: 120 minute timer or continuous ON
- Interior halogen light
- Heavy duty stainless steel body construction
- "Cold Door" design with double pane glass
- Reinforced door hinges
- Oven door can support weight limit of 60 lbs.
- Oven cavity is insulated with ultra-high temperature fiberglass insulation
- 4 Stainless steel wire shelves included
- Warranty: 2 year parts & 1 year labor exclusive of lights, gaskets and glass (60 days)
- Ovens can be staked (kit required)



AX-514RH

Half Size Convection Oven with Humidity Manual Controls - Reversing Fan - 4 shelves



Manual controls	Time, temperature, humidity
Load capacity	4 shelves for half size sheet pans
High speed reversing fan	1 (3200 rpm)
Space between shelves	3" (75 mm)
Power requirements	2,700 Watts / 208-240 V / 60 / 1 Oven supplied with power cord and plug
Temperature	86° - 540° F
Equipped with	120 minute timer - Signal at end of cycle
Cavity size (inches)	18.7"x15"x12.6" (WxDxH)
Unit dimensions (inches)	22.05" x 25.48" x 20.85" (WxDxH)
Shipping dimensions (inches)	23.63" x 26.77" x 21.65" (WxDxH)
Net / Ship weight	73 lb / 80 lb

Features

- Advanced airflow design
- Automatic high speed reversing fan
- Manual control: 120 minute timer or continuous ON
- Interior halogen light
- Includes electro valve for direct water connection
- Micro safety switch shuts oven off when door is open
- Heavy duty stainless steel body construction
- "Cold Door" design with double pane glass
- Reinforced door hinges
- Oven door can support weight limit of 80 lbs.
- Oven cavity is insulated with ultra-high temperature fiberglass insulation
- 4 Stainless steel wire shelves included
- Ovens can be stacked (kit required)
- Warranty: 2 year parts & 1 year labor exclusive of lights, gaskets and glass (60 days)



AX-514RHD

**Half Size Convection Oven with Humidity
Digital controls - Reversing Fan - 4 shelves**



NEMA 6-20



Intertek



Intertek



Digital controls	Time, temperature, humidity, 3 cooking cycles for each program, automatic pre-heating
Load capacity	4 shelves for half size sheet pans
High speed reversing fan	1 (3200 rpm)
Space between shelves	3" (75 mm)
Power requirements	2,700 Watts / 208-240 V / 60 / 1 Oven supplied with power cord and plug
Temperature	86° - 500° F
Equipped with	16 hour timer - Signal at end of cycle
Cavity size (inches)	18.7"x15"x12.6" (WxDxH)
Unit dimensions (inches)	22.05" x 25.48" x 20.85" (WxDxH)
Shipping dimensions (inches)	23.63" x 26.77" x 21.65" (WxDxH)
Net / Ship weight	73 lb / 80 lb

Features

- Advanced airflow design
- Automatic high speed reversing fan
- Digital programmable controls / 99 programs / automatic pre-heating / 3 cooking cycles for each program
- Interior halogen light
- Includes electro valve for direct water connection
- Micro safety switch shuts oven off when door is open
- Heavy duty stainless steel body construction
- "Cold Door" design with double pane glass
- Reinforced door hinges
- Oven door can support weight limit of 80 lbs.
- Oven cavity is insulated with ultra-high temperature fiberglass insulation
- 4 Stainless steel wire shelves included
- Ovens can be stacked (kit required)
- Warranty: 2 year parts & 1 year labor exclusive of lights, gaskets and glass (60 days)

- Ovens can be staked (kit required)



AX-824RH

Full Size Convection Oven with Humidity Manual Controls - Reversing Fans - 4 shelves

COMES WITH
POWER CORD
NO PLUG
INCLUDED



Manual controls	Time, temperature, humidity
Load capacity	4 shelves for full size sheet pans
High speed reversing fans	2 (3,200 rpm)
Space between shelves	3.14" (80 mm)
Power requirements	5,600 Watts / 208-240 V / 60 /1 Oven supplied with power cord only no plug
Temperature	86° - 540° F
Equipped with	120 minute timer - Signal at end of cycle
Cavity size (inches)	29.33" x 19.29" x 13.58" (WxDxH)
Unit dimensions (inches)	33.5" x 30.2" x 25.9" (WxDxH)
Shipping dimensions (inches)	35.44" x 31.10" x 29.53" (WxDxH)
Net / Ship weight	126 lb / 154 lb

Features

- Advanced airflow design
- Automatic high speed reversing fans
- Manual control: 120 minute timer or continuous ON
- Interior halogen light
- Includes electro valve for direct water connection
- Micro safety switch shuts oven off when door is open
- Heavy duty stainless steel body construction
- "Cold Door" design with double pane glass
- Reinforced door hinges
- Oven door can support weight limit of 80 lbs.
- Oven cavity is insulated with ultra-high temperature fiberglass insulation
- 4 Stainless steel wire shelves included
- Ovens can be stacked (kit required)
- Warranty: 2 year parts & 1 year labor exclusive of lights, gaskets and glass (60 days)



AX-824RHD

**Full Size Convection Oven with Humidity
Digital controls - Reversing Fans - 4 shelves**

COMES WITH
POWER CORD
NO PLUG
INCLUDED



Digital controls	Time, temperature, humidity, 3 cooking cycles for each program, automatic pre-heating	Features
Load capacity	4 shelves for full size sheet pans	
High speed reversing fans	2 (3,200 rpm)	<ul style="list-style-type: none"> • Advanced airflow design • Automatic high speed reversing fans • Digital programmable controls / 99 programs / automatic pre-heating / 3 cooking cycles for each program • Interior halogen light • Includes electro valve for direct water connection • Micro safety switch shuts oven off when door is open • Heavy duty stainless steel body construction • "Cold Door" design with double pane glass • Reinforced door hinges • Oven door can support weight limit of 80 lbs. • Oven cavity is insulated with ultra-high temperature fiberglass insulation • 4 Stainless steel wire shelves included • Ovens can be stacked (kit required) • Warranty: 2 year parts & 1 year labor exclusive of lights, gaskets and glass (60 days)
Space between shelves	3.14" (80 mm)	
Power requirements	5,600 Watts / 208-240 V / 60 / 1 Oven supplied with power cord only no plug	
Temperature	86° - 500° F	
Equipped with	16 hour timer - Signal at end of cycle	
Cavity size (inches)	29.33" x 19.29" x 13.58" (WxDxH)	
Unit dimensions (inches)	33.5" x 30.2" x 25.9" (WxDxH)	
Shipping dimensions (inches)	35.44" x 31.10" x 29.53" (WxDxH)	
Net / Ship weight	126 lb / 154 lb	



AX-824RHD-EV

**Full Size Convection Oven with Humidity
Reversing Fans - 4 shelves**

COMES WITH
POWER CORD
NO PLUG
INCLUDED



Adjustable controls	Time, temperature, humidity, 3 cooking cycles for each program, automatic pre-heating
Load capacity	4 shelves for full size sheet pans
High speed reversing fans	2 (3,200 rpm)
Space between shelves	3.14" (80 mm)
Power requirements	5,600 Watts / 208-240 V / 60 / 1 Oven supplied with power cord only no plug
Temperature	86° - 500° F
Equipped with	16 hour timer - Signal at end of cycle
Cavity size (inches)	29.33" x 19.29" x 13.58" (WxDxH)
Unit dimensions (inches)	33.5" x 30.5" x 25.9" (WxDxH)
Shipping dimensions (inches)	41" x 39" x 38" (WxDxH)
Net / Ship weight	126 lb / 154 lb

Features

- Advanced airflow design
- Automatic high speed reversing fans
- Digital programmable controls / 99 programs / automatic pre-heating / 3 cooking cycles for each program
- Quick digital menu system capable of storing up to 8 recipes programmable by USB flash drive.
- Interior halogen light
- Includes electro valve for direct water connection
- Micro safety switch shuts oven off when door is open
- Heavy duty stainless steel body construction
- "Cold Door" design with double pane glass
- Reinforced door hinges
- Oven door can support weight limit of 80 lbs.
- Oven cavity is insulated with ultra-high temperature fiberglass insulation
- Ovens can be stacked (kit required)
- Warranty: 2 year parts & 1 year labor exclusive of lights, gaskets and glass (60 days)

AVAILABLE Q4 2017



NEMA 6-15
15A-250V



NEMA 6-15
15A-250V

MODEL	AX-PR5 - Proofer for AXIS half size "5" series	AX-PR8 - Proofer for AXIS full size "8" series
Manual control	Temperature, humidity	Temperature, humidity
Load capacity	8 shelves for half size sheet pans (not included)	8 shelves for full size sheet pans (not included)
Space between trays	3" (75 mm)	3" (75 mm)
Power / Voltage	2,000 Watts / 208-240 V / 60 / 1 Supplied with power cord and plug	2,000 Watts / 208-240 V / 60 / 1 Supplied with power cord and plug
Temperature	Max of 140° F	Max of 140° F
Equipped with	Temperature thermostat - ON/OFF	Temperature thermostat - ON/OFF
Unit Dimension	23.63"x27.17"x 33.86" (WxDxH)	36.23"x32.68"x 33.86" (WxDxH)
Shipping dimensions	25.99"x27.56"x39.77" (WxDxH)	37.40"x37"x39.77" (WxDxH)
Net / Ship Weight	89 lb / 133 lb	139 lb / 233 lb
Features	Manual fill water pan - Height adjustable legs for easy cleaning under proofer - Heavy duty stainless steel body construction - Reinforced door hinges - Warranty: 2 years parts & 1 year labor exclusive of lights, gaskets and glass	




MODEL	AX-501 Oven Stand	AX-801 Oven Stand
Features	<ul style="list-style-type: none"> • Heavy duty oven stand with tray support • Slides for Half Size Ovens • Dimensions (Inches): 23.30"x 20.87"x 31.50" (WxDxH) • Holds any Axis half size oven ("5" Series) • Heavy duty stainless steel (assembly required) • Shipping dimensions (inches): 37.40"x 24.80"x 7.88" (WxDxH) • Ship Weight: 44 lb 	<ul style="list-style-type: none"> • Heavy duty oven stand with tray support • Slides for Full Size Ovens • Dimensions (Inches): 33.47"x 24.40"x 31.50" • Holds any Axis full size oven ("8" Series) • Heavy duty stainless steel (assembly required) • Shipping dimensions: 38.60"x 28.35"x 8.66" • Ship Weight: 54 lb

MODEL	RID 01 DEFLECTOR "5" SERIES	RID 02 DEFLECTOR "8" SERIES	STACKING KIT "5" SERIES	STACKING KIT "8" SERIES
Features	<ul style="list-style-type: none"> • Air deflector plate for delicate baking • Installs without tools for fan protection 	<ul style="list-style-type: none"> • Air deflector plate for delicate baking • Installs without tools for fan protection 	<ul style="list-style-type: none"> • KIT5: Stacking kit for "5" Series 	<ul style="list-style-type: none"> • KIT5: Stacking kit for "8" Series




LINE DRAWINGS


AX-514

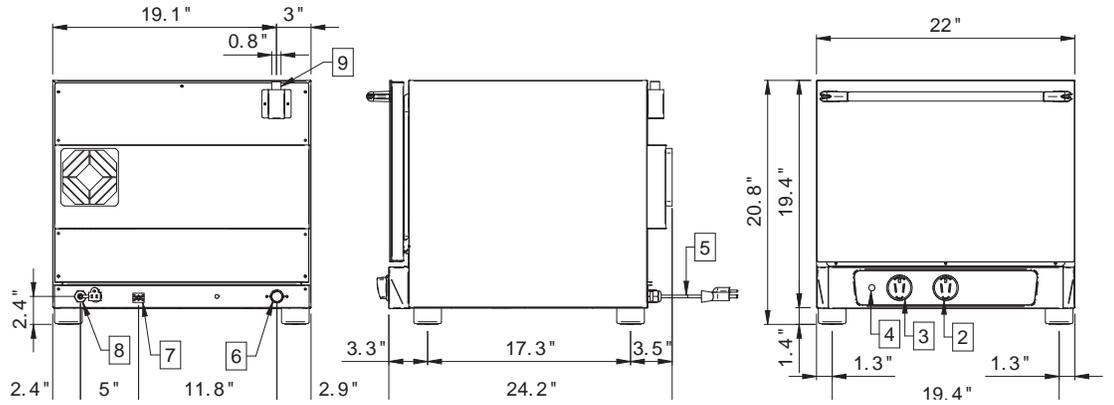

AX-514RH

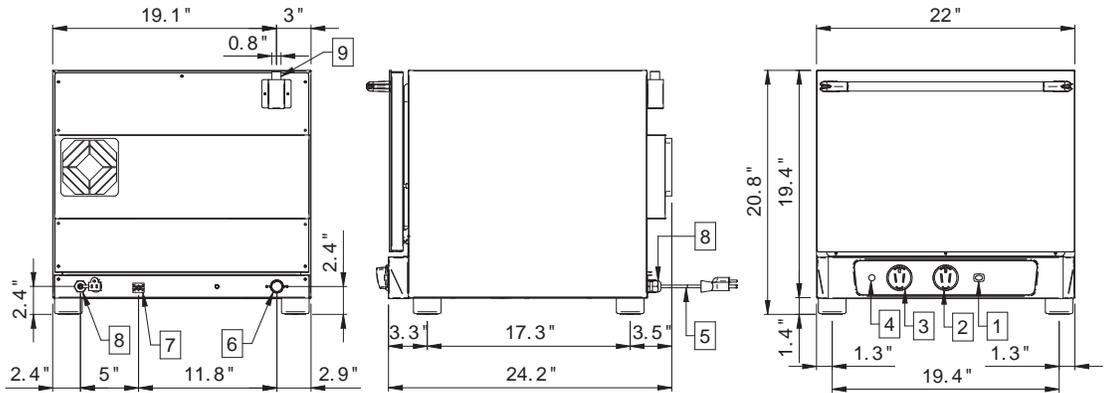


AX-514RHD

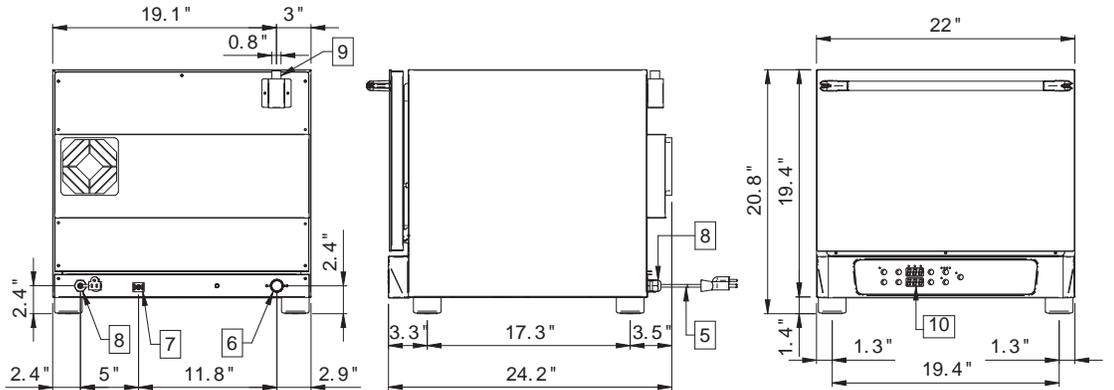


LINE DRAWINGS


AX-824RH

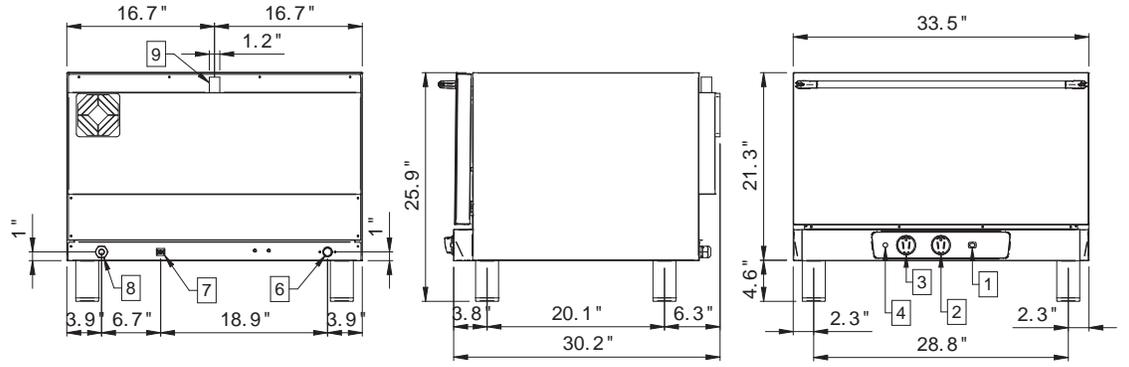

AX-824RHD

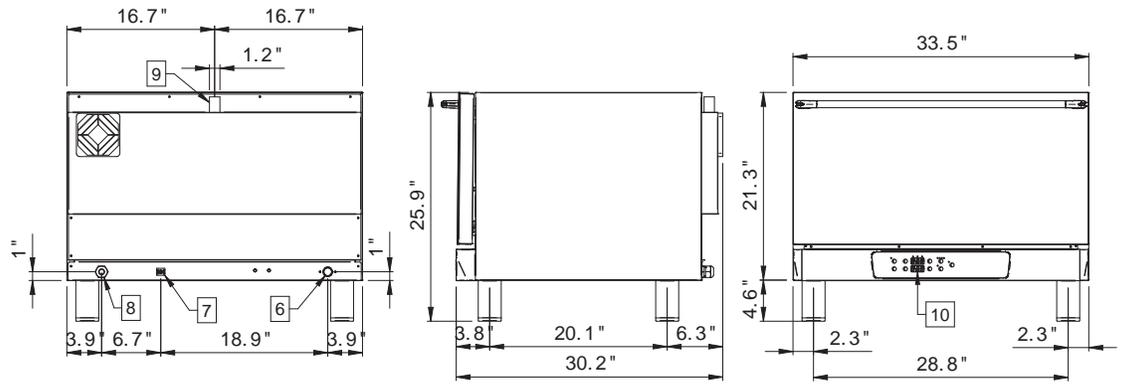

AX-824RHD-EV

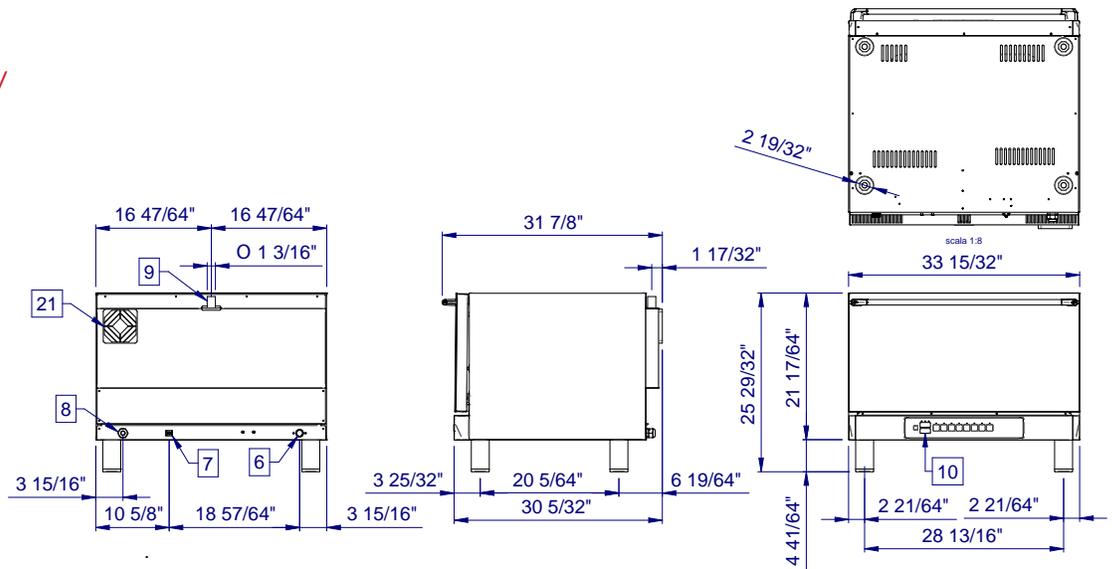



HART + PRICE

OKLAHOMA | TEXAS | ARKANSAS
Tel (214) 521-9129 or Toll free (800) 777-9129
hello@hartprice.com

AXIS is a registered trade mark of MVP Group Corp. Specifications subject to change without notice.