

Direct Draw Beer Coolers

FDD Series

(800) 777-9129



FDD-36-N FDD-59-N FDD-69-N FDD-79-N FDD-95-N
 FDD-36S-N FDD-59S-N FDD-69S-N FDD-79S-N FDD-95S-N

Item # _____

Standard Features

- Our new “Next Generation” direct draw units have been completely redesigned to be fully front breathing, able to handle those tight bar applications and extreme **100°F environments**.
- Refrigeration system is a free flowing air system throughout the box to ensure “ICE COLD” products at all times with a side mount evaporator system.
- Heavy duty 18 gauge stainless steel top, durable stainless steel inside walls and coved corner floor. Reinforced bottom door frame to protect your long term investment.
- Polymer “**Dunnage style**” removable protective floor for extended life of your box and designed for greater air flow underneath your kegs.
- 3” diameter polished stainless steel draft tower with more taps per tower, standard. Cold air into the towers is designed thru our unique forced air design which provides you with the most air flow into your towers than anyone in the industry.
- Field interchangeable doors from Solid to Glass or Glass to Solid to adapt to ever changing needs.
- Units come with compressor mounted on the left side with service friendly slide out rail system. Drain is located in the back compressor housing away from your customer’s line of sight.
- **LED light** underneath the mullion to protect itself from normal operations.



FDD-59-N



FDD-79S-N



FDD-95-N

Options & Accessories

- Low profile castors with reinforced rail
- Heavy duty castors with reinforced rail
- 6” Adjustable stainless steel legs
- Single / Double draft towers
- 220 volts / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards

Direct Draw	Model	Doors	Towers	Taps	Kegs	Capacity cu ft	Amp	HP	Volt	NEMA Plug	Cabinet Dimensions			Shipping (Wt. Cubes)	
											W	*D	H		
	FDD-36(S)	1	1	2	2	14.6	3.5	1/6	115	5-15P	36-3/4"	29"	36-7/8"	275	29
	FDD-59(S)	2	2	3	3	19.4	6.5	1/3	115	5-15P	59-1/2"	29"	36-7/8"	314	51
	FDD-69(S)	2	2	3	3	23.7	6.5	1/3	115	5-15P	69-1/2"	29"	36-7/8"	370	59
	FDD-79(S)	3	2	4	4	28.2	6.5	1/3	115	5-15P	80"	29"	36-7/8"	396	68
	FDD-95(S)	3	2	4	5	35	6.5	1/3	115	5-15P	95-1/2"	29"	36-7/8"	409	81

Specifications

Construction

Heavy duty stainless steel top, 18 gauge. Black vinyl front, sides and back. (S) Models have stainless steel front and sides. Galvanized back panel. Interior constructed of heavy duty stainless steel walls with coved corner NSF approved stainless steel floor. Reinforced polymer removable protective floor. Door is comprised of heavy duty black vinyl steel. (S) Models are stainless steel. Provided with locks per door, magnetic door gaskets, removable without tools. Door openings have a plastic breaker strips to retard condensate formation. Unit comes complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration system

Self-contained capillary tube system using environmentally friendly (CFC Free) R-134a refrigerant. Front breathing compressor on left side for built-in applications. Evaporator coil is mounted to interior left side above the compressor. Large fan motor and fan blades for greater air flow. Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing.

Access for the condensing unit behind the front grill, slides out for easy cleaning and maintenance.

Cabinets are designed to maintain temperatures between 33° F to 38° F in the interior cabinet.

Lights


Interior LED light underneath the mullion.

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p). 36" has (1) 2 way CO2 valve, 59" & 69" have (1) 3 way CO2 valve & 79" & 95" have (1) 4 way CO2 valve. Drain is located in the back inside compressor housing.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

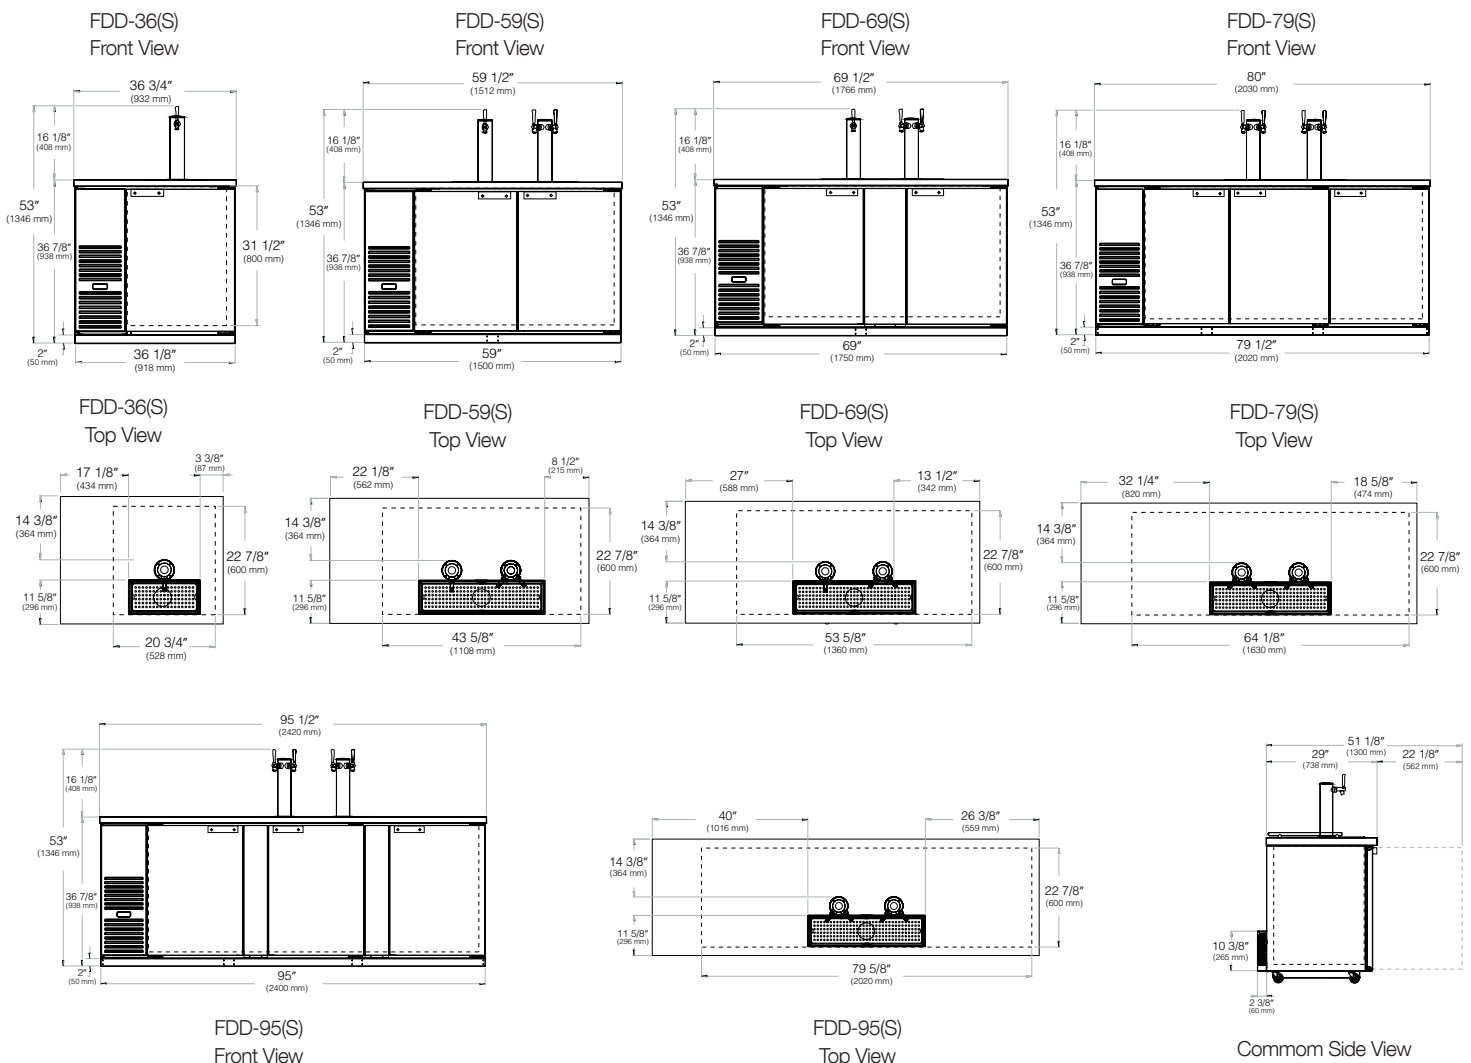

Slim Line - Direct Draw Beer Coolers

FDD-24 Series

(800) 777-9129



FDD-24-48 FDD-24-60 FDD-24-72
 FDD-24-48S FDD-24-60S FDD-24-72S

Item # _____

Standard Features

- Our new "Next Generation" direct draw units have been completely redesigned to be fully front breathing, able to handle those tight bar applications and extreme **100°F environments**.
- Refrigeration system is a free flowing air system throughout the box to ensure "ICE COLD" products at all times with a side mount evaporator system.
- Heavy duty 18 gauge stainless steel top, durable stainless steel inside walls and coved corner floor. Reinforced bottom door frame to protect your long term investment.
- Polymer "**Dunnage style**" removable protective floor for extended life of your box and designed for greater air flow underneath your kegs.
- 3" diameter polished stainless steel draft tower with more taps per tower, standard. Cold air into the towers is designed thru our unique forced air design which provides you with the most air flow into your towers than anyone in the industry.
- Field interchangeable doors from Solid to Glass or Glass to Solid to adapt to ever changing needs.
- Units come with compressor mounted on the left side with service friendly slide out rail system. Drain is located in the back compressor housing away from your customer's line of sight.
- **LED light** underneath the mullion to protect itself from normal operations.



FDD-24-48



FDD-24-60S



FDD-24-72

Options & Accessories

- 3" casters.
- 6" Adjustable stainless steel legs
- Single / Double draft towers
- 220 volts / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards

Direct Draw	Model	Doors	Towers	Taps	Kegs	Amp	HP	Volt	NEMA Plug	Cabinet Dimensions			Shipping	
										W	"D	H	(Wt. Cubes)	
	FDD-24-48(S)	2	1	2	2	5.5	1/3	115	5-15P	49-5/8"	24-5/8"	35-1/2"	235	33
	FDD-24-60(S)	2	2	3	3	5.5	1/3	115	5-15P	61-1/4"	24-5/8"	35-1/2"	290	41
	FDD-24-72(S)	2	2	3	3	55	1/3	115	5-15P	72"	24-5/8"	35-1/2"	340	48

(S) Stainless steel units

Direct Draw Beer Coolers

FDD Series

(800) 777-9129



Specifications

Construction

Heavy duty stainless steel top, 18 gauge. Black vinyl front, sides and back. (S) Models have stainless steel front and sides. Galvanized back panel. Interior constructed of heavy duty stainless steel walls with coved corner NSF approved stainless steel floor. Reinforced polymer removable protective floor. Door is comprised of heavy duty black vinyl steel. (S) Models are stainless steel. Provided with locks per door, magnetic door gaskets, removable without tools. Door openings have a plastic breaker strips to retard condensate formation. Unit comes complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration system

Self-contained capillary tube system using environmentally friendly (CFC Free) R-134a refrigerant. Front breathing compressor on left side for built-in applications. Evaporator coil is mounted to interior left side above the compressor. Large fan motor and fan blades for greater air flow. Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing.

Access for the condensing unit behind the front grill, slides out for easy cleaning and maintenance.

Cabinets are designed to maintain temperatures between 33° F to 38° F in the interior cabinet.

Lights

Interior LED light underneath the mullion.

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p). 48" unit provides (1) 2 way CO2 valve, 60" & 72" have (1) 3 way CO2 valve. Drain is located in the back inside compressor housing.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

FDD-24-48(S)
Top View

FDD-24-60(S)
Top View

FDD-24-72(S)
Top View

