

# Merchandisers Refrigerators Swing Door

(800) 777-9129



FM-16

FMD-23

FMD-49

FMD-72

Item # \_\_\_\_\_

## Standard Features

- Glass Door Merchandisers are designed with quality and durability that you will not find in any other products in its class.
- **No-chip exterior**, durable and stylish black vinyl finish - Std.
- Easy to clean NSF approved white coated steel interior, Stainless Steel floor.
- Electronic controller for a proper temperature thru out your box.
- "Low-E" consumption **LED interior lighting** provides greater visibility, shadow-free illumination and enhanced product display.
- Factory balanced and environmentally friendly refrigeration system: R-134A (refrigerators).
- On & Off door rocker switch which reduces the amount of moisture and helps preserve temperature inside the cabinet.
- High density, CFC-Free polyurethane insulation.
- "Low-E" double pane thermal insulated glass door on refrigerators and triple pane on freezers with extruded aluminum frames for the best efficiency and durability.
- High/low temperature alarm and automatic defrost.
- Adjustable epoxy coated wire shelves (four per door - standard).
- Bottom mount compressor system with service friendly rail system.
- Illuminated exterior sign panel.
- NSF-7 listed for storage and/or display of packaged or bottle products.



FM-16

FMD-49



FMD-72



## Options & Accessories

- Epoxy coated shelves
- 3" castors
- 220 volts / 50 cycles / 1 phase



\*Conforms to UL & NSF-7 standards

Refrigerator	Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions			Shipping	
										L	D	H	Wt.	Cubes
	FM-16	1	16	4	5.8	1/4	115	5-15P	8'	27"	33 1/2"	78 5/8"	216	37
	FMD-23	1	23	4	6.1	1/4	115	5-15P	8'	27"	33 1/2"	78 5/8"	262	47
	FMD-49	2	49	8	6.9	1/3	115	5-15P	8'	54"	33 1/2"	78 5/8"	424	93
	FMD-72	3	72	12	10.3	1/2	115	5-15P	8'	83"	33 1/2"	78 5/8"	690	140

\*All specifications are subject to change without notice.

# Merchandisers Refrigerators Swing Door

(800) 777-9129

**FAGOR**



## Specifications

### Construction

Exterior made of durable stylish black vinyl on steel, non-chip or peel. White coated steel interior, NSF approved with high quality stainless steel floor. High density and environmentally friendly CFC-Free polyurethane insulation.

Entire cabinet is foamed in place including mullions on double doors. Double pane thermal insulated glass door on refrigerators and triple pane on freezers with extruded aluminum frames for the best efficiency. Self-closing doors with magnetic gaskets, positive seal closure system and aluminum handles. On & Off door rocker switch.

Low energy consumption LED interior lighting,

full height along the door frame including a safety shield per section outside the food zone.

### Refrigeration System

Factory oversized and balanced refrigeration system, using environmentally friendly, CFC Free refrigerant: R-134A (refrigerators). Bottom mounted condensing unit on a rail system. Evaporator coil is mounted to interior top panel. Large fan motor and fan blades for better air flow. Refrigerators are designed to maintain temperatures between 33° F to 38°F.

Precise electronic controller. Automatic defrost and temperature door alarm.

### Shelving


Four epoxy coated wire shelves with clips per door. Adjustable in 1/2" increments. Aluminum pilasters with stainless steel clips.

### Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p).

### Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

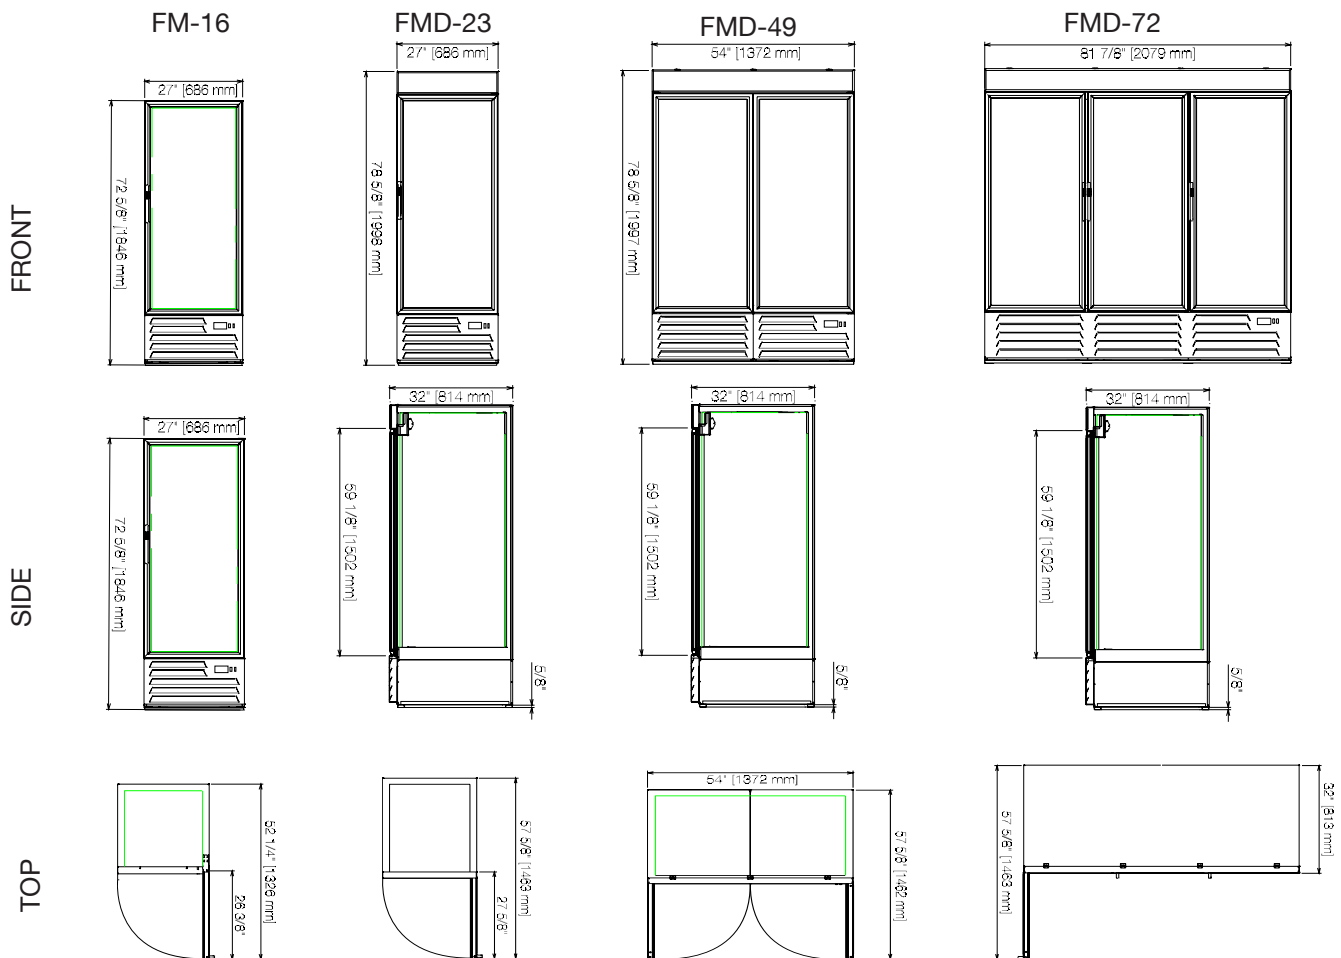

The manufacturer reserves the rights to modify materials and specifications without notice. Printed in the USA • 08/2013

# Merchandisers Freezer Swing Door

(800) 777-9129



FMD-23F

Item # \_\_\_\_\_

## Standard Features

- Glass Door Merchandisers are designed with quality and durability that you will not find in any other products in its class.
- **No-chip exterior**, durable and stylish black vinyl finish - Std.
- Easy to clean NSF approved white coated steel interior, Stainless Steel floor.
- Electronic controller for a proper temperature thru out your box.
- “Low-E” consumption **LED interior lighting** provides greater visibility, shadow-free illumination and enhanced product display.
- Factory balanced and environmentally friendly refrigeration system: R-404A (freezer).
- On & Off door rocker switch which reduces the amount of moisture and helps preserve temperature inside the cabinet.
- High density, CFC-Free polyurethane insulation.
- “Low-E” double pane thermal insulated glass door on refrigerators and triple pane on freezers with extruded aluminum frames for the best efficiency and durability.
- High/low temperature alarm and automatic defrost.
- Adjustable epoxy coated wire shelves (four per door - standard).
- Bottom mount compressor system with service friendly rail system.
- Illuminated exterior sign panel.
- NSF-7 listed for storage and/or display of packaged or bottle products.



FMD-23F



## Options & Accessories

- Epoxy coated shelves
- 3” castors
- 220 volts / 50 cycles / 1 phase



\*Conforms to UL & NSF-7 standards

Freezer	Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions			Shipping	
										L	D	H	Wt.	Cubes
	FMD-23F	1	23	4	9.8	3/4	115	5-15P	8'	27"	33 1/2"	78 5/8"	262	47

\*All specifications are subject to change without notice.

# Merchandisers Freezer Swing Door

(800) 777-9129

**FAGOR**



## Specifications

### Construction

Exterior made of durable stylish black vinyl on steel, non-chip or peel. White coated steel interior, NSF approved with high quality stainless steel floor. High density and environmentally friendly CFC-Free polyurethane insulation.

Entire cabinet is foamed in place including mullions on double doors. Double pane thermal insulated glass door on refrigerators and triple pane on freezers with extruded aluminum frames for the best efficiency. Self-closing doors with magnetic gaskets, positive seal closure system and aluminum handles. On & Off door rocker switch.

Low energy consumption LED interior lighting,

full height along the door frame including a safety shield per section outside the food zone.

### Refrigeration System

Factory oversized and balanced refrigeration system, using environmentally friendly, CFC Free refrigerant: R-404A (freezer). Bottom mounted condensing unit on a rail system. Evaporator coil is mounted to interior top panel. Large fan motor and fan blades for better air flow. Freezer maintains an optimal temperature of -10°F.

Precise electronic controller. Automatic defrost and temperature door alarm.

### Shelving

Four epoxy coated wire shelves with clips per door. Adjustable in 1/2" increments. Aluminum pilasters with stainless steel clips.

### Others


Unit is supplied standard with a 8' cord and plug (Nema 5-15p).

### Warranty


3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

FMD-23F


Front View

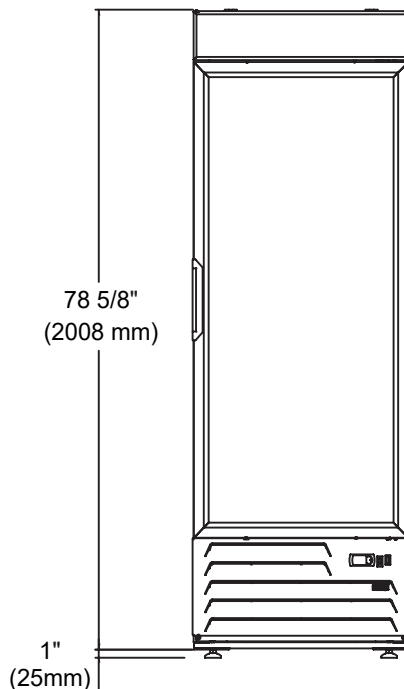

Common Side View

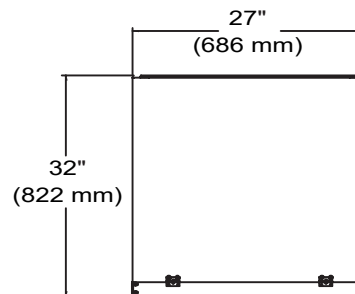

Top View

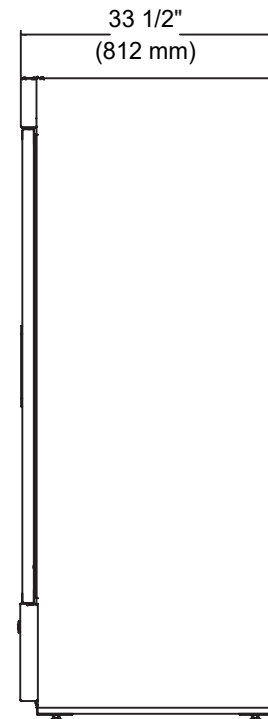

The manufacturer reserves the rights to modify materials and specifications without notice. Printed in the USA • 08/2013

# Sushi & Tapas Display Cases

## VTP(SL) Series

VTP-139      VTP-175  
 VTP-139SL      VTP-175SL

(800) 777-9129




Item # \_\_\_\_\_

### Standard Features

- Our cases are designed with durability and elegance along with a **unique dual refrigeration** system (VTP-SL only).
- Stainless steel construction with plastic ends and anodized aluminum channels.
- Elegant curved front glass design with interior LED lighting.
- Cold plate design underneath the pans to keep products fresher and maintain products at 39° - 46° F temperature in food pans. Sushi case (VTP-SL) also includes refrigeration on top of food pans. Digital controller for enhanced performance.
- Interior will allow up to 11.5" plate for display and standard with interior grate for flush display of your products. Grate can be turned upside down to increase overall internal height and cooling capacity.
- Unit comes standard with Compressor mounted on the right side.

**\*\* Refrigerated display case - Not for overnight storage**

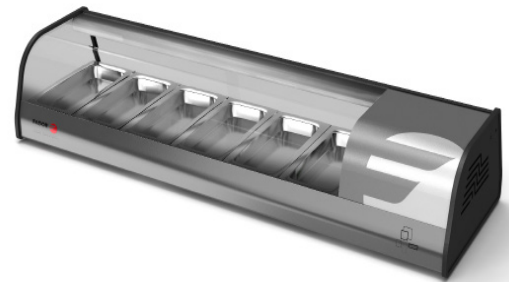

VTP-139



VTP-175-SL

### Options & Accessories

- 220 volts/ 50 cycles/ 1 phase



\*Conforms to UL & NSF-7 standards

	Model	Pans	Volts	Amps	HP	Cabinet Dimensions			Shipping	
						L	D	H	(Wt. Cubes)	
Tapas	VTP-139	6	115	2.3	1/6	54-1/2"	16"	10"	112	7.2
	VTP-175	8	115	2.3	1/6	68-1/2"	16"	10"	135	10.5
Sushi	Model	Pans	Volts	Amps	HP	Cabinet Dimensions			Shipping	
						L	D	H	(Wt. Cubes)	
	VTP-139SL	6	115	2.3	1/6	54-1/2"	16"	10"	112	7.2
	VTP-175SL	8	115	2.3	1/6	68-1/2"	16"	10"	135	10.5

\*Refrigerated display case - Not for overnight storage  
 \*\*All specifications are subject to change without notice

# Sushi & Tapas Display Cases

## VTP(SL) Series

(800) 777-9129



### Specifications

#### Construction

Heavy duty stainless steel construction with anodized aluminum profile. Sliding glass service door. Curved glass design.

Unit comes complete with Ecomate CFC-Free polyurethane insulation, foamed in place.

#### Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-134a refrigerant. Static refrigeration below the pans. (SL) Large

evaporator coil on top / Bottom static refrigeration cold plate on bottom. Evaporator coil is mounted on the left side of the unit. Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing. Access for the condensing unit behind the unit for easy cleaning and maintenance.

Cabinets are designed to maintain temperatures between 36° F to 46° F in the interior cabinet.

#### Lights


Interior LED lights.

#### Others


Unit is supplied standard with an 8' cord and plug (Nema 5-15p).

#### Warranty


1 year parts and labor warranty plus 4 additional year compressor warranty. (Continental U.S.A. & Canada only).

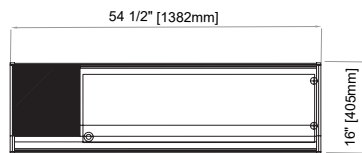


VTPSL-139 Top

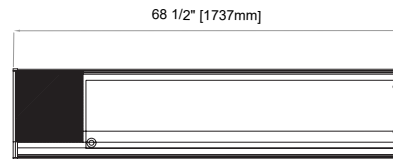


VTPSL-175 Top

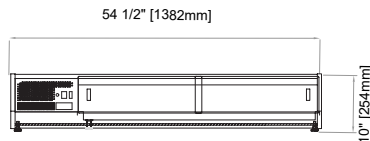

VTPSL-139 Front

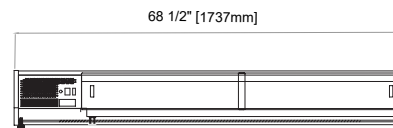

VTPSL-175 Front



Common End View

The manufacturer reserves the rights to modify materials and specifications without notice.

# Refrigerated Countertop Rail CPR Series

(800) 777-9129



CPR-4

CPR-8

CPR-60-4

Item # \_\_\_\_\_

## Standard Features

- Our "CPR" series counter top display is designed for durability and strength that you will not find in any other products in its class.
- All stainless steel interior and exterior construction for a clean and safe food environment. Coved corner floor to meet NSF requirements.
- Elegant top surface with mirror stainless steel finish and full color display.
- Refrigeration is designed to maintain 33° to 41°F in the pans at all times.
- Digital temperature controller with automatic defrost and temperature display to keep food quality for a longer period of time.
- Static refrigeration system to keep pans at NSF required temperatures.
- High density CFC-free polyurethane insulation and balanced CFC-free refrigeration system, R-134A.
- Units come standard with clear poly carbonate 1/6 size pans. CPR-60-4 comes with (4) 4" deep pans, with lid for serving utensil. CPR-4 come with (4) 4" deep pans and CPR-8 with (8) 4" deep pans. Both with lids.
- Mounted on 1/2" adjustable legs.



\*Conforms to UL & NSF-7 standards



CPR-4



CPR-8



CPR-60-4

Counter top	Model	Pans	Volts	Amps	HP	Crated Weight (lbs)	Cabinet Dimensions		
							W	D	H
	Counter top Rail								
	CPR-4	4	115	2.5	1/6	66	15-3/4"	26-1/8"	11-1/4"
	CPR-8	8	115	2.5	1/6	110	28-1/8"	26-1/8"	11-1/4"
	CPR-60-4	4	115	2.5	1/6	60	28-1/8"	16"	10"
	CPR-4 only options	Description							
	Togo-8	8 section "To-go" condiment packet station. Stainless steel with black acrylic.							

\* Height does not include 1" for bumper  
\*\* All specifications are subject to change without notice

## Specifications

### Construction

Heavy duty stainless steel exterior front, sides and back. Interior completely constructed of heavy duty stainless steel with covered cornered floor. Unit comes complete with a 2" CFC-Free polyurethane insulation, foamed in place.

### Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a) Bottom mount condensing unit and static cold wall coils are located on the bottom.

Refrigerator is designed to maintain temperatures between 33° F to 41° F during normal operations at an ambient temperature of 85° F.

Energy savings digital controllers and thermostats. Automatic defrost, time initiated.

### Pans

CPR-60-4 includes (4) clear poly carbonate 1/6 size pans, 4" deep, with lid. CPR-4 comes with (4) clear poly carbonate 1/6 size pans, 4" deep, with lid.

CPR-8 comes with (8) clear poly carbonate 1/6 size pans, 4" deep, with lid.


### Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p). Standard with non adjustable feet.


### Warranty

1 year parts and labor warranty plus 4 additional year compressor warranty. (Continental U.S.A. & Canada only).


CPR-4  
Top View



CPR-4  
Front View




CPR-4  
Side View



CPR-8  
Top View


28 1/8" [715mm]



CPR-8  
Front View




CPR-8  
Side View

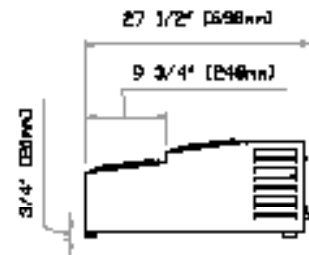


CPR-60-4  
Top View

28 1/8" [714mm]

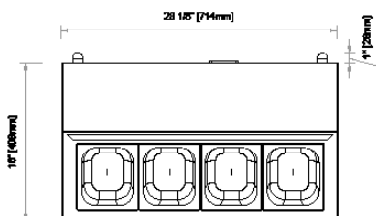

CPR-60-4  
Front View



CPR-60-4  
Side View

