

# Reach-in Refrigerators & Freezers

## QV Series

QVR-1-N    QVR-2-N    QVR-3-N  
 QVR-1G-N    QVR-2G-N    QVR-3G-N  
 QVF-1-N    QVF-2-N    QVF-3-N

(800) 777-9129



Item # \_\_\_\_\_

### Standard Features

- Our new “Next Generation” QV series Reach-in’s are built to the highest standards and redesigned to ensure proper temperature even in **100 deg. environments.**
- Heavy duty stainless steel door with full length recessed door handles; interior step design for added insulation and protection of door gasket to protect your long term investment. Single door units are **field reversible** for your ever changing needs.
- Air distribution channel on both single and double door freezers for proper temperature thru out the cabinet.
- Refrigerators maintain product temperatures from 33° to 38°F / freezers: -8°F, includes automatic defrost for the best temperatures in food preparation.
- Both Refrigerators and Freezers **accepts 18” x 26” sheet pans.**
- Enhanced digital controller with Energy Savings feature refrigerators and freezers to keep food quality for longer period of time. **Door alarm** to prevent food from spoiling.
- **2-3/8” Ecomate** CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion (ODP) and zero global warming potential (GWP).
- Glass doors units are dual panel with aluminum frames and LED lighting for greater visibility of your products.



QVR(F)-1-N



QVR-2G-N



QVR(F)-3-N



### Options & Accessories

- 6” adjustable legs (set of 4)
- Epoxy coated shelves
- Bun tray racks
- 220 volts / 50 cycles / 1 phase



Conforms to UL & NSF-7 standards

| Model                         | Door | Capacity (Cu.Ft) | Shelves | Amps | HP    | Voltage | Nema Plug | Cord Length | Cabinet Dimensions L / D / H |         |         | Shipping (Wt. / Cubes) |     |
|-------------------------------|------|------------------|---------|------|-------|---------|-----------|-------------|------------------------------|---------|---------|------------------------|-----|
| Refrigerators                 |      |                  |         |      |       |         |           |             |                              |         |         |                        |     |
| QVR-1-N                       | 1    | 24.5             | 3       | 5.0  | 1/4   | 115     | 5-15P     | 8'          | 27-1/2"                      | 31-1/8" | 79-3/8" | 295                    | 51  |
| QVR-2-N                       | 2    | 52               | 6       | 6.9  | 1/3   | 115     | 5-15P     | 8'          | 55-1/4"                      | 31-1/8" | 79-3/8" | 460                    | 95  |
| QVR-3-N                       | 3    | 76               | 9       | 11.5 | 3/4   | 115     | 5-15P     | 8'          | 81-7/8"                      | 31-1/8" | 79-3/8" | 665                    | 155 |
| Refrigerators with glass door |      |                  |         |      |       |         |           |             |                              |         |         |                        |     |
| QVR-1G-N                      | 1    | 24.5             | 3       | 5.2  | 1/4   | 115     | 5-15P     | 8'          | 27-1/2"                      | 33"     | 79-3/8" | 315                    | 51  |
| QVR-2G-N                      | 2    | 52               | 6       | 7.3  | 1/3   | 115     | 5-15P     | 8'          | 55-1/4"                      | 33"     | 79-3/8" | 495                    | 95  |
| QVR-3G-N                      | 3    | 76               | 9       | 11.5 | 3/4   | 115     | 5-15P     | 8'          | 81-7/8"                      | 33"     | 79-3/8" | 705                    | 155 |
| Freezers                      |      |                  |         |      |       |         |           |             |                              |         |         |                        |     |
| QVF-1-N                       | 1    | 24.5             | 3       | 9.8  | 3/4   | 115     | 5-15P     | 8'          | 27-1/2"                      | 31-1/8" | 79-3/8" | 305                    | 51  |
| QVF-2-N                       | 2    | 52               | 6       | 11.5 | 1     | 115     | 5-15P     | 8'          | 55-1/4"                      | 31-1/8" | 79-3/8" | 475                    | 95  |
| QVF-3-N                       | 3    | 76               | 9       | 14.5 | 1-1/4 | 115     | 5-15P     | 8'          | 81-7/8"                      | 31-1/8" | 79-3/8" | 685                    | 155 |

\* Height does not include 4” castors (5” overall) or 6” for legs.  
 \*\*All specifications are subject to change without notice



## Specifications

### Construction

Heavy duty stainless steel exterior front and sides. Aluminum top and galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved cornered floor. Door is heavy duty stainless steel exterior and stainless steel interior, step design with stainless steel hinged solid doors and positive seal. Provided with locks per section, magnetic door gaskets, removable without tools, self-closing and with 90° stay open feature. Recessed full length door handle. Door openings have a plastic breaker strips to retard condensate formation. Single door units are field reversible. Glass door units have a dual pane glass, thermal insulated with heavy duty aluminum frame and door handle. Unit comes complete with a 2-3/8" Ecomate CFC-Free polyurethane insulation, foamed in place. Air distribution channel on both single and

double door freezers. Interior incandescent light with safety shield per section outside the food zone and activated by door rocker switch. Glass doors units have full height LED lighting along the side.

### Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a refrigerator / R-404a 3 doors refrigerator & freezers) Bottom mount condensing unit on a rail system for easy access. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° F to 38°F and freezers -8°F to 0°F during normal operations.

Energy savings digital controllers and thermostats. Automatic defrost, time initiated.

### Shelving


(3) Epoxy coated wire shelves with clips per door. Adjustable in 1/2" increments. Aluminum pilasters with stainless steel clips.

### Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p). Standard 4" diameter casters, front 2 with brakes.

### Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. ( Continental U.S.A. & Canada only).

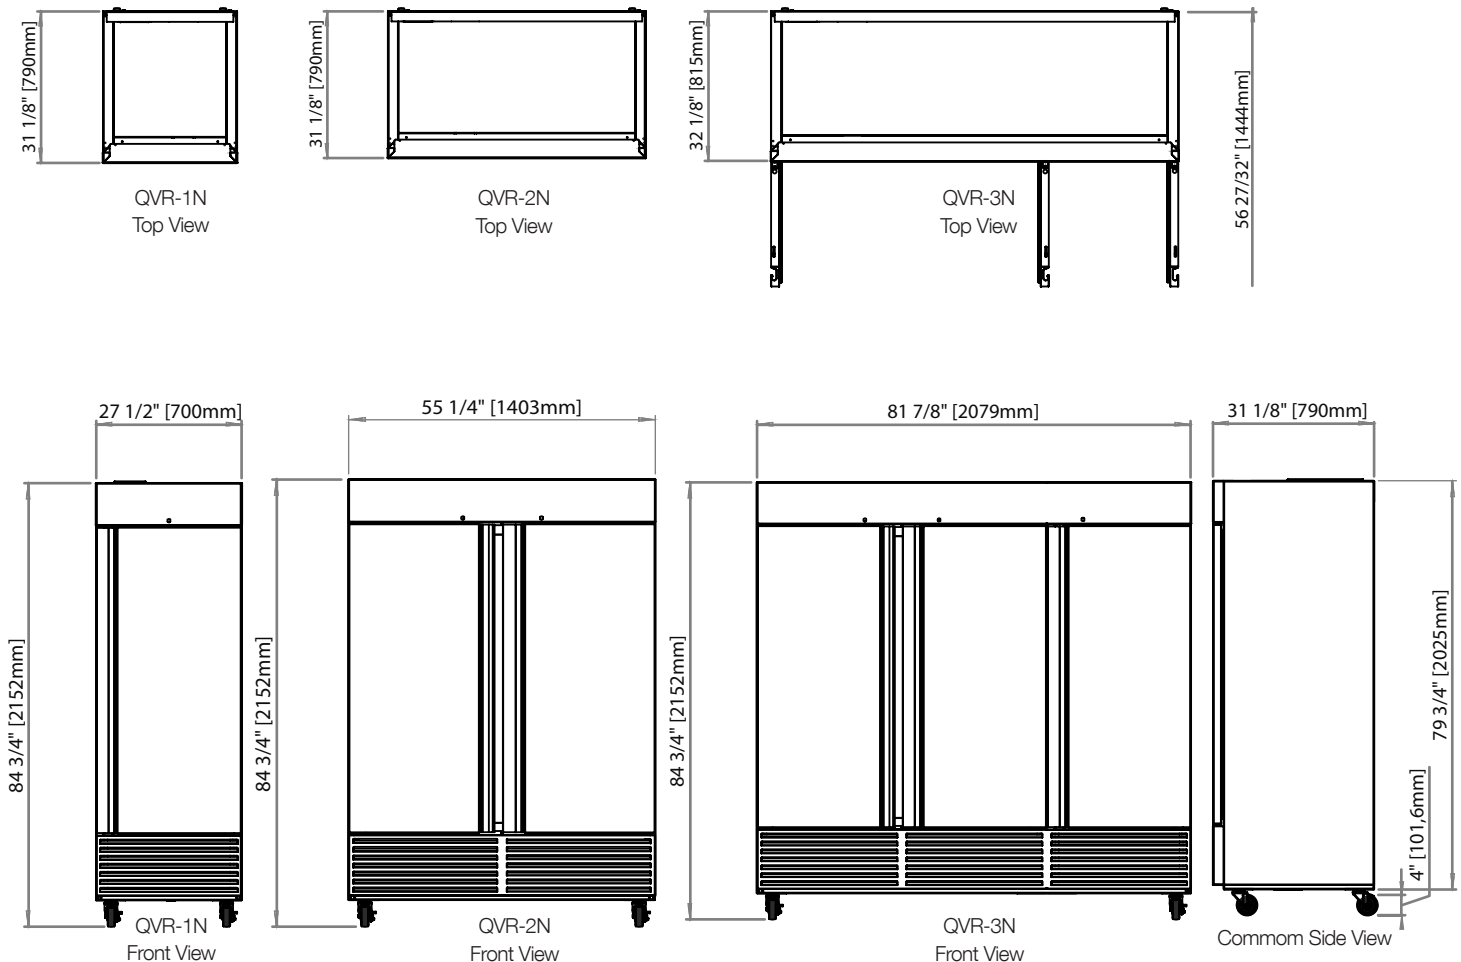

The manufacturer reserves the rights to modify materials and specifications without notice. 03012018

# Undercounter Refrigerators & Freezers

## FUR/FUF Series **New!**

(800) 777-9129



FUR-27-N    FUR-36-N    FUR-48-N    FUR-60-N    FUR-72-N  
 FUF-27-N                      FUF-48-N    FUF-60-N

Item # \_\_\_\_\_

### Standard Features

- Our new “Next Generation” undercounters have been completely re-designed to ensure proper temperature even in **100 deg. environments.**
- Exclusive base design for over **30% greater interior** capacity than most in it's class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Covered corner floor to meet NSF requirements.
- Heavy duty stainless steel door with full length recessed door handles; **interior step design** for added insulation and protection of door gasket.
- Factory balanced refrigeration system, environmentally friendly R-134A Refrigerators & R-290 Freezers.
- Front breathing refrigeration system for built-in applications.
- 36” high working height / 3” casters (opt.) for 34” high applications.



FUR(F)-27-N



FUR(F)-48-N



FUR-72-N



\*Conforms to UL & NSF-7 standards

### Options & Accessories

- Epoxy coated shevles with clips
- 3” casters (set of 4, front 2 w/ brakes)
- Removable 4” back splash.
- Single & Double tier overshef
- 220 volts / 50 cycles / 1 phase

|         | Refrigerator |      |                  |         |      |     |         |           |             |                      | Shipping |         |             |    |
|---------|--------------|------|------------------|---------|------|-----|---------|-----------|-------------|----------------------|----------|---------|-------------|----|
|         | Model        | Door | Capacity (Cu.Ft) | Shelves | Amps | HP  | Voltage | Nema Plug | Cord Length | Cabinet Dimensions L | D"       | H       | Wt. / Cubes |    |
|         | FUR-27-N     | 1    | 9.5              | 2       | 2.7  | 1/6 | 115     | 5-15P     | 8'          | 27-3/4"              | 30-1/8"  | 35-3/4" | 182         | 21 |
|         | FUR-36-N     | 2    | 13.1             | 2       | 2.7  | 1/6 | 115     | 5-15P     | 8'          | 36-3/8"              | 30-1/8"  | 35-3/4" | 258         | 33 |
|         | FUR-48-N     | 2    | 16.7             | 4       | 3.8  | 1/4 | 115     | 5-15P     | 8'          | 48-3/8"              | 30-1/8"  | 35-3/4" | 260         | 35 |
|         | FUR-60-N     | 2    | 20.6             | 4       | 3.8  | 1/4 | 115     | 5-15P     | 8'          | 60-3/8"              | 30-1/8"  | 35-3/4" | 305         | 47 |
|         | FUR-72-N     | 3    | 25.4             | 6       | 3.8  | 1/4 | 115     | 5-15P     | 8'          | 72-1/2"              | 30-1/8"  | 35-3/4" | 365         | 56 |
| Freezer | Model        | Door | Capacity (Cu.Ft) | Shelves | Amps | HP  | Voltage | Nema Plug | Cord Length | Cabinet Dimensions L | D"       | H       | Wt. / Cubes |    |
|         | FUF-27-N     | 1    | 9.5              | 2       | 2.5  | 1/4 | 115     | 5-15P     | 8'          | 27-3/4"              | 30-1/8"  | 35-3/4" | 183         | 21 |
|         | FUF-48-N     | 2    | 16.7             | 4       | 6.5  | 1/2 | 115     | 5-15P     | 8'          | 48-3/8"              | 30-1/8"  | 35-3/4" | 265         | 35 |
|         | FUF-60-N     | 2    | 20.6             | 4       | 6.5  | 1/2 | 115     | 5-15P     | 8'          | 60-3/8"              | 30-1/8"  | 35-3/4" | 310         | 47 |

\* Depth does not include 1" bumper.

# Undercounter Refrigerators & Freezers

## FUR/FUF Series

(800) 777-9129



### Specifications

#### Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor. Door is heavy duty stainless steel exterior and interior, in step design with stainless steel hinges and positive seal. Provided with magnetic door gaskets, removable without tools, self-closing and with 120° stay open feature. Recessed full length door handle. Door openings have a plastic breaker strips to retard condensate formation.

Unit comes complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

#### Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a Refrigerator / R-290a Freezers) Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° F to 38°F and freezers 0° to -5° F during normal operations. Digital controllers and thermostats on freezers, analog thermostats on refrigerators.

#### Shelving


(2) Epoxy coated shelving per door with clips. Adjustable in 1/2" increments per shelf.

#### Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p). Standard 5 diameter casters, front 2 with brakes.

#### Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

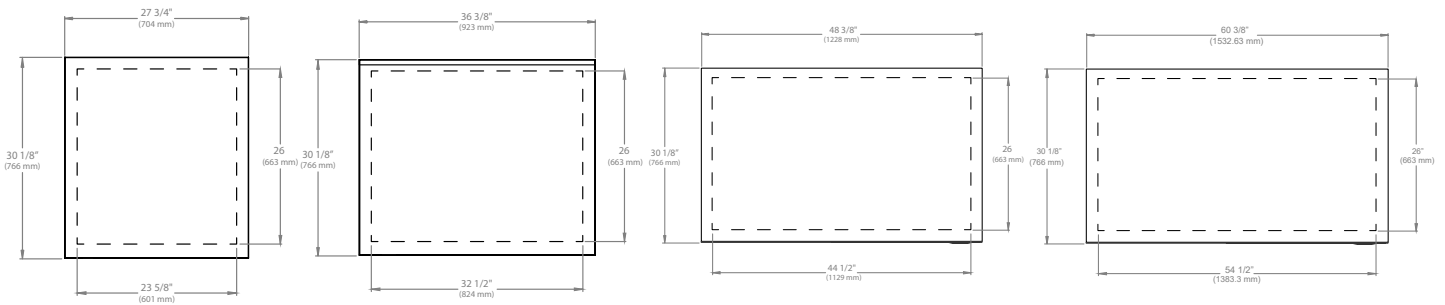


FUR-27-N Top View

FUR-36-N Top View

FUR-48-N Top View

FUR-60-N Top View

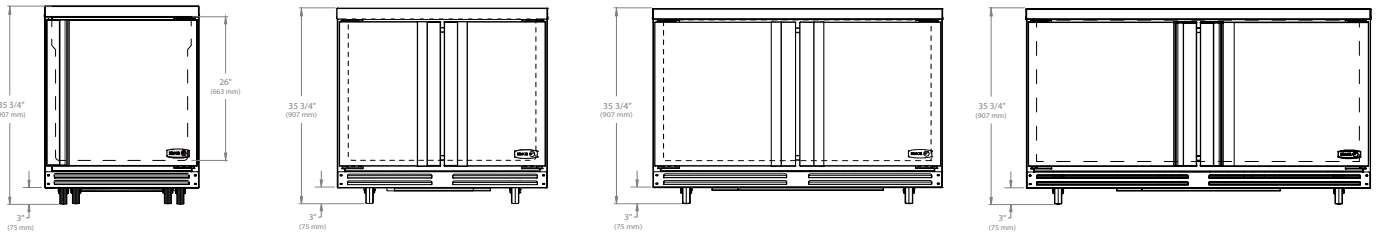


FUR-27-N Front View


FUR-36-N Front View

FUR-48-N Front View


FUR-60-N Front View

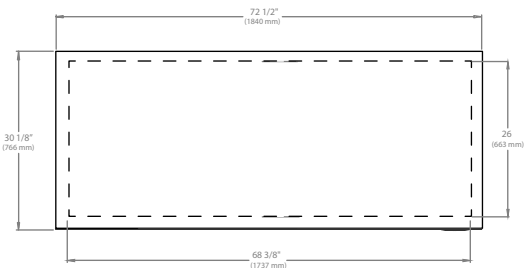

FUR-72-N Top View

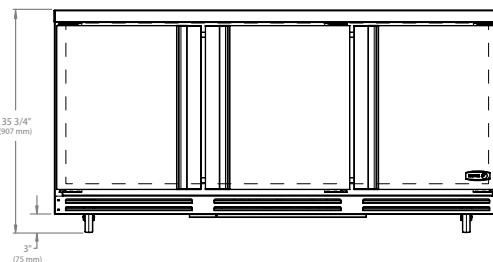

FUR-72-N Front View



Common Side View

The manufacturer reserves the rights to modify materials and specifications without notice.