

Reach-in Refrigerators & Freezers

QV Series

QVR-1-N QVR-2-N QVR-3-N
QVR-1G-N QVR-2G-N QVR-3G-N
QVF-1-N QVF-2-N QVF-3-N

(800) 777-9129

FAGOR



Item # _____

Standard Features

- Our new "Next Generation" QV series Reach-in's are built to the highest standards and redesigned to ensure proper temperature even in **100 deg. environments**.
- Heavy duty stainless steel door with full length recessed door handles; interior step design for added insulation and protection of door gasket to protect your long term investment. Single door units are **field reversible** for your ever changing needs.
- Air distribution channel on both single and double door freezers for proper temperature thru out the cabinet.
- Refrigerators maintain product temperatures from 33° to 38°F / freezers: -8°F, includes automatic defrost for the best temperatures in food preparation.
- Both Refrigerators and Freezers **accepts 18" x 26" sheet pans**.
- Enhanced digital controller with Energy Savings feature refrigerators and freezers to keep food quality for longer period of time. **Door alarm** to prevent food from spoiling.
- **2-3/8" Ecomate** CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion (ODP) and zero global warming potential (GWP).
- Glass doors units are dual panel with aluminum frames and LED lighting for greater visibility of your products.



QVR(F)-1-N



QVR-2G-N



QVR(F)-3-N



Options & Accessories

- 6" adjustable legs (set of 4)
- Epoxy coated shelves
- Bun tray racks
- 220 volts / 50 cycles / 1 phase



Conforms to UL & NSF-7 standards

Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions L / D / *H			Shipping (Wt. / Cubes)	
Refrigerators													
QVR-1-N	1	24.5	3	5.0	1/4	115	5-15P	8'	27-1/2"	31-1/8"	79-3/8"	295	51
QVR-2-N	2	52	6	6.9	1/3	115	5-15P	8'	55-1/4"	31-1/8"	79-3/8"	460	95
QVR-3-N	3	76	9	11.5	3/4	115	5-15P	8'	81-7/8"	31-1/8"	79-3/8"	665	155
Refrigerators with glass door													
QVR-1G-N	1	24.5	3	5.2	1/4	115	5-15P	8'	27-1/2"	33"	79-3/8"	315	51
QVR-2G-N	2	52	6	7.3	1/3	115	5-15P	8'	55-1/4"	33"	79-3/8"	495	95
QVR-3G-N	3	76	9	11.5	3/4	115	5-15P	8'	81-7/8"	33"	79-3/8"	705	155
Freezers													
QVF-1-N	1	24.5	3	9.8	3/4	115	5-15P	8'	27-1/2"	31-1/8"	79-3/8"	305	51
QVF-2-N	2	52	6	11.5	1	115	5-15P	8'	55-1/4"	31-1/8"	79-3/8"	475	95
QVF-3-N	3	76	9	14.5	1-1/4	115	5-15P	8'	81-7/8"	31-1/8"	79-3/8"	685	155

* Height does not include 4" castors (5" overall) or 6" for legs.

**All specifications are subject to change without notice

Reach-in Refrigerators & Freezers

QV Series

(800) 777-9129

FAGOR



Specifications

Construction

Heavy duty stainless steel exterior front and sides. Aluminum top and galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved cornered floor. Door is heavy duty stainless steel exterior and stainless steel interior, step design with stainless steel hinged solid doors and positive seal. Provided with locks per section, magnetic door gaskets, removable without tools, self-closing and with 90° stay open feature. Recessed full length door handle. Door openings have a plastic breaker strips to retard condensate formation. Single door units are field reversible. Glass door units have a dual pane glass, thermal insulated with heavy duty aluminum frame and door handle. Unit comes complete with a 2-3/8" Ecomate CFC-Free polyurethane insulation, foamed in place. Air distribution channel on both single and

double door freezers. Interior incandescent light with safety shield per section outside the food zone and activated by door rocker switch. Glass doors units have full height LED lighting along the side.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a refrigerator / R-404a 3 doors refrigerator & freezers) Bottom mount condensing unit on a rail system for easy access. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° F to 38°F and freezers -8°F to 0°F during normal operations.

Energy savings digital controllers and thermostats. Automatic defrost, time initiated.

Shelving


(3) Epoxy coated wire shelves with clips per door. Adjustable in 1/2" increments. Aluminum pilasters with stainless steel clips.

Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p). Standard 4" diameter casters, front 2 with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

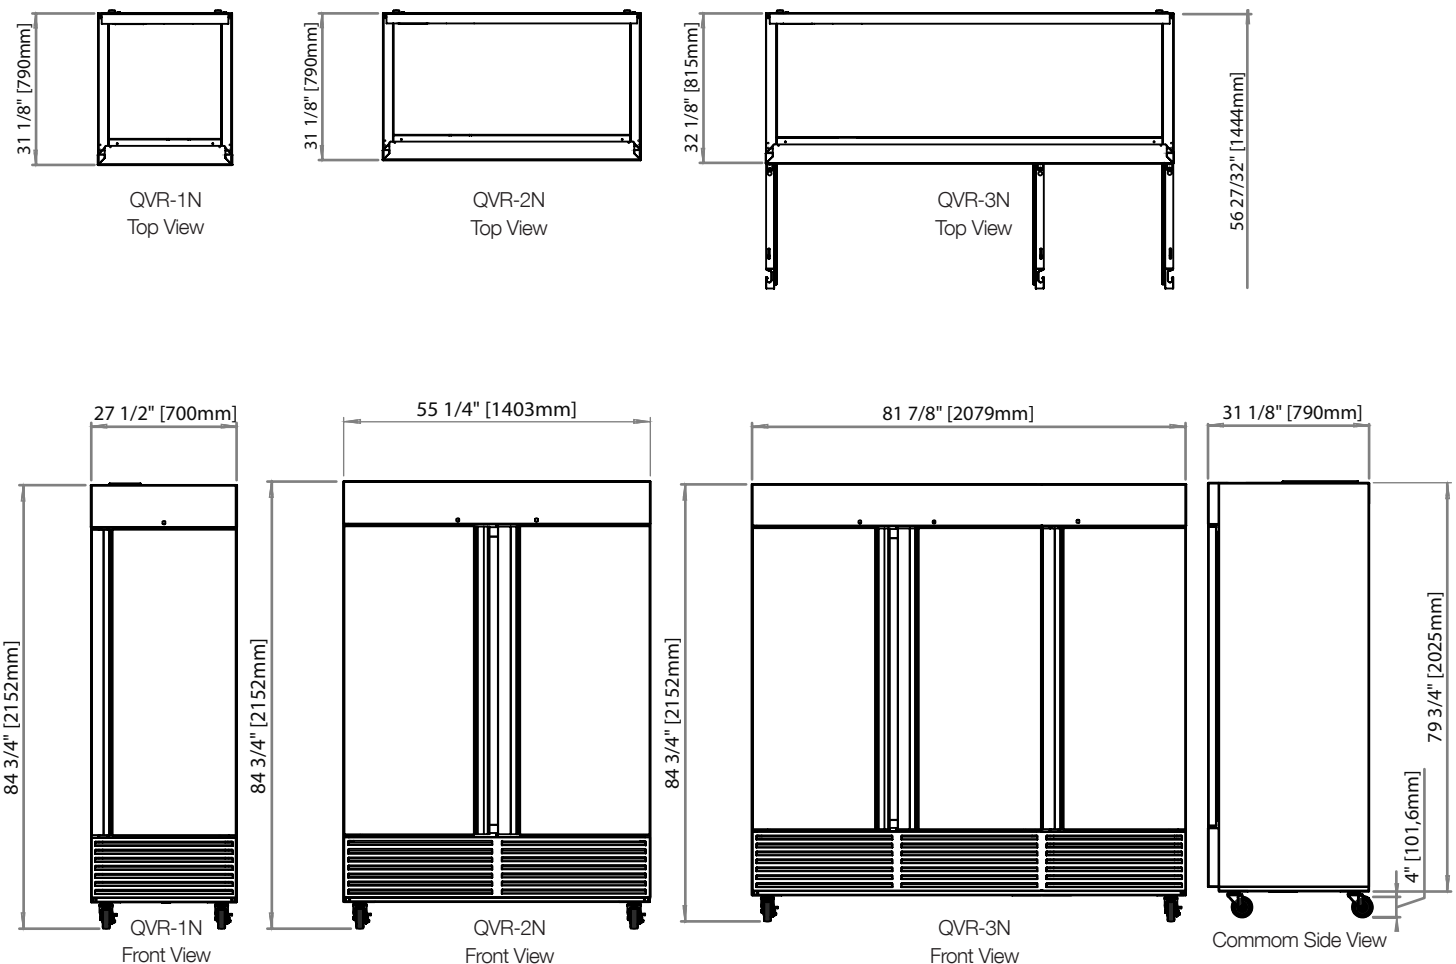

The manufacturer reserves the rights to modify materials and specifications without notice. 03012018

Undercounter Refrigerators & Freezers

FUR/FUF Series **New!**

(800) 777-9129

FAGOR



FUR-27-N FUR-36-N FUR-48-N FUR-60-N FUR-72-N
FUF-27-N FUF-48-N FUF-60-N

Item # _____

Standard Features

- Our new "Next Generation" undercounters have been completely re-designed to ensure proper temperature even in **100 deg. environments.**
- Exclusive base design for over **30% greater interior** capacity than most in it's class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- Heavy duty stainless steel door with full length recessed door handles; **interior step design** for added insulation and protection of door gasket.
- Factory balanced refrigeration system, environmentally friendly R-134A Refrigerators & R-290 Freezers.
- Front breathing refrigeration system for built-in applications.
- 36" high working height / 3" casters (opt.) for 34" high applications.



FUR(F)-27-N



FUR(F)-48-N



FUR-72-N



Options & Accessories

- Epoxy coated shevles with clips
- 3" casters (set of 4, front 2 w/ brakes)
- Removable 4" back splash.
- Single & Double tier overshef
- 220 volts / 50 cycles / 1 phase

*Conforms to UL & NSF-7 standards

Refrigerator

Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions			Shipping (Wt. / Cubes)	
									L	D"	H		
FUR-27-N	1	9.5	2	2.7	1/6	115	5-15P	8'	27-3/4"	30-1/8"	35-3/4"	182	21
FUR-36-N	2	13.1	2	2.7	1/6	115	5-15P	8'	36-3/8"	30-1/8"	35-3/4"	258	33
FUR-48-N	2	16.7	4	3.8	1/4	115	5-15P	8'	48-3/8"	30-1/8"	35-3/4"	260	35
FUR-60-N	2	20.6	4	3.8	1/4	115	5-15P	8'	60-3/8"	30-1/8"	35-3/4"	305	47
FUR-72-N	3	25.4	6	3.8	1/4	115	5-15P	8'	72-1/2"	30-1/8"	35-3/4"	365	56
Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions			Shipping (Wt. / Cubes)	
									L	D"	H		
FUF-27-N	1	9.5	2	2.5	1/4	115	5-15P	8'	27-3/4"	30-1/8"	35-3/4"	183	21
FUF-48-N	2	16.7	4	6.5	1/2	115	5-15P	8'	48-3/8"	30-1/8"	35-3/4"	265	35
FUF-60-N	2	20.6	4	6.5	1/2	115	5-15P	8'	60-3/8"	30-1/8"	35-3/4"	310	47

* Depth does not include 1" bumper.

Undercounter Refrigerators & Freezers

FUR/FUF Series

(800) 777-9129

FAGOR



Specifications

Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor. Door is heavy duty stainless steel exterior and interior, in step design with stainless steel hinges and positive seal. Provided with magnetic door gaskets, removable without tools, self-closing and with 120° stay open feature. Recessed full length door handle. Door openings have a plastic breaker strips to retard condensate formation.

Unit comes complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a Refrigerator / R-290a Freezers) Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° F to 38°F and freezers 0° to -5° F during normal operations. Digital controllers and thermostats on freezers, analog thermostats on refrigerators.

Shelving


(2) Epoxy coated shelving per door with clips. Adjustable in 1/2" increments per shelf.

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p). Standard 5 diameter casters, front 2 with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

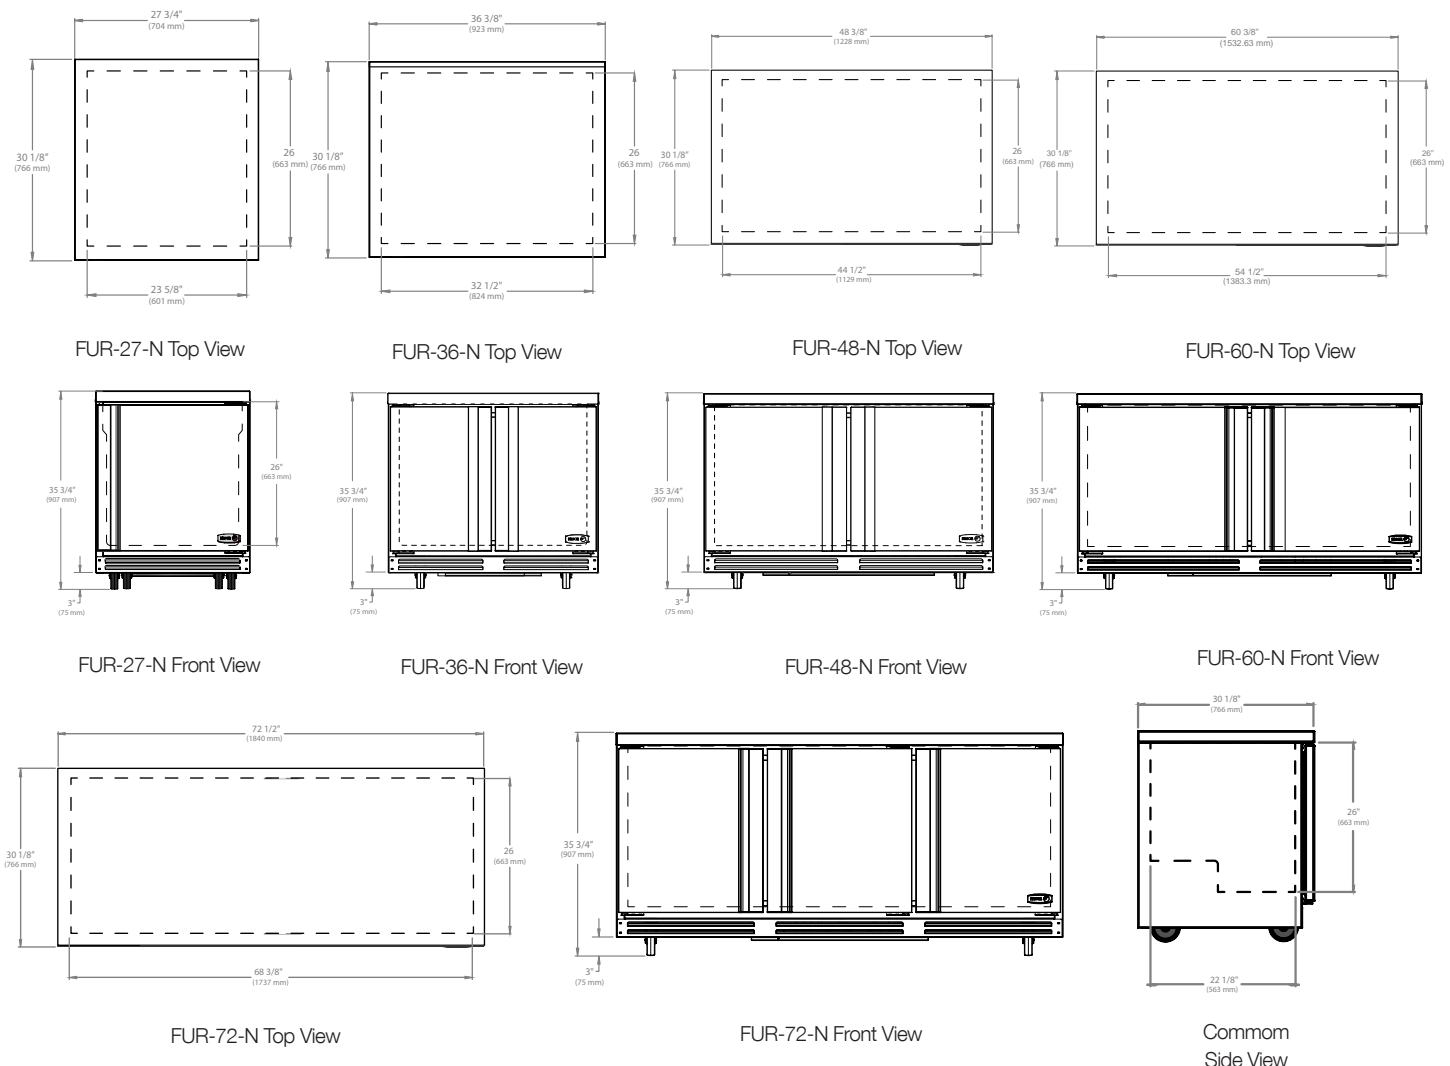

The manufacturer reserves the rights to modify materials and specifications without notice.

Merchandisers Refrigerators Swing Door

(800) 777-9129

FAGOR



FM-16

FMD-23

FMD-49

FMD-72

Item # _____

Standard Features

- Glass Door Merchandisers are designed with quality and durability that you will not find in any other products in its class.
- **No-chip exterior**, durable and stylish black vinyl finish - Std.
- Easy to clean NSF approved white coated steel interior, Stainless Steel floor.
- Electronic controller for a proper temperature thru out your box.
- "Low-E" consumption **LED interior lighting** provides greater visibility, shadow-free illumination and enhanced product display.
- Factory balanced and environmentally friendly refrigeration system: R-134A (refrigerators).
- On & Off door rocker switch which reduces the amount of moisture and helps preserve temperature inside the cabinet.
- High density, CFC-Free polyurethane insulation.
- "Low-E" double pane thermal insulated glass door on refrigerators and triple pane on freezers with extruded aluminum frames for the best efficiency and durability.
- High/low temperature alarm and automatic defrost.
- Adjustable epoxy coated wire shelves (four per door - standard).
- Bottom mount compressor system with service friendly rail system.
- Illuminated exterior sign panel.
- NSF-7 listed for storage and/or display of packaged or bottle products.



FM-16

FMD-49



FMD-72



Options & Accessories

- Epoxy coated shelves
- 3" castors
- 220 volts / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards

Refrigerator	Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions			Shipping	
										L	D	H	Wt. /	Cubes
	FM-16	1	16	4	5.8	1/4	115	5-15P	8'	27"	33 1/2"	78 5/8"	216	37
	FMD-23	1	23	4	6.1	1/4	115	5-15P	8'	27"	33 1/2"	78 5/8"	262	47
	FMD-49	2	49	8	6.9	1/3	115	5-15P	8'	54"	33 1/2"	78 5/8"	424	93
	FMD-72	3	72	12	10.3	1/2	115	5-15P	8'	83"	33 1/2"	78 5/8"	690	140

*All specifications are subject to change without notice.

Merchandisers Refrigerators Swing Door

(800) 777-9129

FAGOR



Specifications

Construction

Exterior made of durable stylish black vinyl on steel, non-chip or peel. White coated steel interior, NSF approved with high quality stainless steel floor. High density and environmentally friendly CFC-Free polyurethane insulation.

Entire cabinet is foamed in place including mullions on double doors. Double pane thermal insulated glass door on refrigerators and triple pane on freezers with extruded aluminum frames for the best efficiency. Self-closing doors with magnetic gaskets, positive seal closure system and aluminum handles. On & Off door rocker switch.

Low energy consumption LED interior lighting,

full height along the door frame including a safety shield per section outside the food zone.

Refrigeration System

Factory oversized and balanced refrigeration system, using environmentally friendly, CFC Free refrigerant: R-134A (refrigerators). Bottom mounted condensing unit on a rail system. Evaporator coil is mounted to interior top panel. Large fan motor and fan blades for better air flow. Refrigerators are designed to maintain temperatures between 33° F to 38°F.

Precise electronic controller. Automatic defrost and temperature door alarm.

Shelving


Four epoxy coated wire shelves with clips per door. Adjustable in 1/2" increments. Aluminum pilasters with stainless steel clips.

Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p).

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

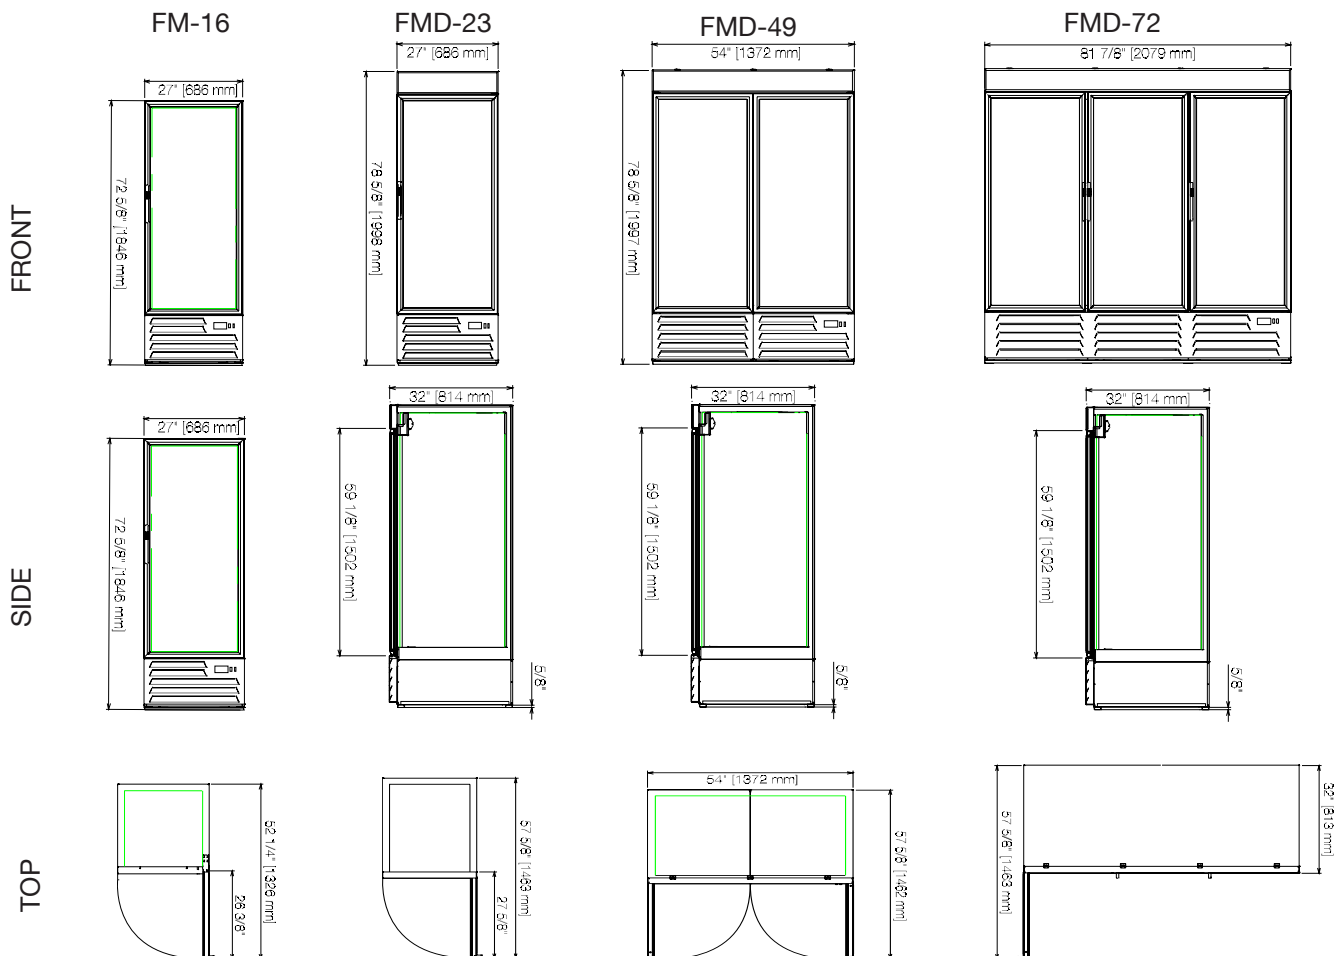

The manufacturer reserves the rights to modify materials and specifications without notice. Printed in the USA • 08/2013

Merchandisers Freezer Swing Door

(800) 777-9129

FAGOR



FMD-23F

Item # _____

Standard Features

- Glass Door Merchandisers are designed with quality and durability that you will not find in any other products in its class.
- **No-chip exterior**, durable and stylish black vinyl finish - Std.
- Easy to clean NSF approved white coated steel interior, Stainless Steel floor.
- Electronic controller for a proper temperature thru out your box.
- "Low-E" consumption **LED interior lighting** provides greater visibility, shadow-free illumination and enhanced product display.
- Factory balanced and environmentally friendly refrigeration system: R-404A (freezer).
- On & Off door rocker switch which reduces the amount of moisture and helps preserve temperature inside the cabinet.
- High density, CFC-Free polyurethane insulation.
- "Low-E" double pane thermal insulated glass door on refrigerators and triple pane on freezers with extruded aluminum frames for the best efficiency and durability.
- High/low temperature alarm and automatic defrost.
- Adjustable epoxy coated wire shelves (four per door - standard).
- Bottom mount compressor system with service friendly rail system.
- Illuminated exterior sign panel.
- NSF-7 listed for storage and/or display of packaged or bottle products.



FMD-23F



Options & Accessories

- Epoxy coated shelves
- 3" castors
- 220 volts / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards

Freezer	Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions			Shipping	
										L	D	H	(Wt. / Cubes)	
	FMD-23F	1	23	4	9.8	3/4	115	5-15P	8'	27"	33 1/2"	78 5/8"	262	47

*All specifications are subject to change without notice.

Merchandisers Freezer Swing Door

(800) 777-9129

FAGOR



Specifications

Construction

Exterior made of durable stylish black vinyl on steel, non-chip or peel. White coated steel interior, NSF approved with high quality stainless steel floor. High density and environmentally friendly CFC-Free polyurethane insulation.

Entire cabinet is foamed in place including mullions on double doors. Double pane thermal insulated glass door on refrigerators and triple pane on freezers with extruded aluminum frames for the best efficiency. Self-closing doors with magnetic gaskets, positive seal closure system and aluminum handles. On & Off door rocker switch.

Low energy consumption LED interior lighting,

full height along the door frame including a safety shield per section outside the food zone.

Refrigeration System

Factory oversized and balanced refrigeration system, using environmentally friendly, CFC Free refrigerant: R-404A (freezer). Bottom mounted condensing unit on a rail system. Evaporator coil is mounted to interior top panel. Large fan motor and fan blades for better air flow. Freezer maintains an optimal temperature of -10°F.

Precise electronic controller. Automatic defrost and temperature door alarm.

Shelving

Four epoxy coated wire shelves with clips per door. Adjustable in 1/2" increments. Aluminum pilasters with stainless steel clips.

Others


Unit is supplied standard with a 8' cord and plug (Nema 5-15p).

Warranty


3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

FMD-23F


Front View

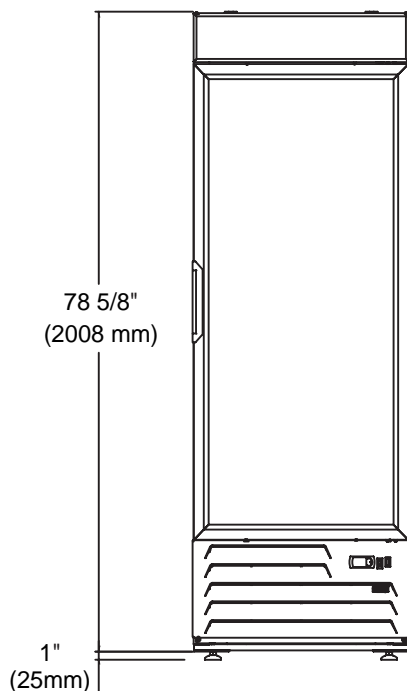

Common Side View

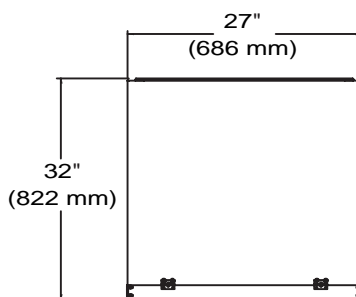

Top View

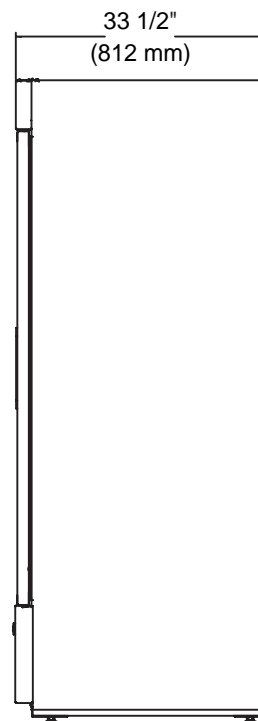

The manufacturer reserves the rights to modify materials and specifications without notice. Printed in the USA • 08/2013

Salad / Sandwich Table

FST Series • **FST-27-8** • **FST-48-12** • **FST-60-16** • **FST-72-18**
• **FST-48-8** • **FST-60-8** • **FST-72-12**

(800) 777-9129

FAGOR



Standard Features

- Our salad / sandwich units are designed with durability and strength that you will not find in any other products in its class.
- All stainless steel interior and exterior construction for a cleaner & safer food environment. Coved corner floor to meet NSF requirements.
- Heavy duty stainless steel door with full length recessed door handles; interior step design for added insulation and protection of door gasket.
- Forced air design underneath the pans to keep products fresher and maintain products at 33° - 41°F temperature in food pans and cabinet interior. Split design with an aluminum divider wall between the food pans and the interior cabinet. Complies with NSF7 standards for food product safety.
- Insulated hood and lid keeps pan temperature colder and minimize condensation. Removable for easy cleaning.
- Front breathing refrigeration system for built-in applications.
- 10" full length removable and reversible cutting board.
- Standard with full sets of 1/6 size pans, clear polycarbonate, 4" deep / will accommodate 6" deep pans.

Options & Accessories

- 6" adjustable legs (set of 4)
- Flat cover in lieu of telescoping cover
- Epoxy coated shelves (clips included)
- Pan dividers
- Stainless steel back panel
- Single and double tier overshell
- 220 volts / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards

Item # _____



FST-27-8



FST-48-12



FST-72-18

Salad Top Prep Tables	Model	Door	Top Pans	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions			Shipping	
										L	D *	H**	(Wt. Cubes)	
	FST-27-8	1	8	1	2.7	1/6	115/60/1	5-15P	8'	27" (685.8 mm)	30" (762 mm)	37-7/8" (939.8 mm)	214 (97 kg)	33 (.94 m³)
	FST-48-8	2	8	2	5.4	1/4	115/60/1	5-15P	8'	48" (1219.2 mm)	30" (762 mm)	37-7/8" (939.8 mm)	305 (139 kg)	55 (1.56 m³)
	FST-48-12	2	12	2	5.4	1/4	115/60/1	5-15P	8'	48" (1219.2 mm)	30" (762 mm)	37-7/8" (939.8 mm)	305 (139 kg)	55 (1.56 m³)
	FST-60-8	2	8	2	6.7	1/3	115/60/1	5-15P	8'	60" (1524 mm)	30" (762 mm)	37-7/8" (939.8 mm)	370 (168 kg)	68 (1.93 m³)
	FST-60-16	2	16	2	6.7	1/3	115/60/1	5-15P	8'	60" (1524 mm)	30" (762 mm)	37-7/8" (939.8 mm)	370 (168 kg)	68 (1.93 m³)
	FST-72-12	3	12	3	6.7	1/3	115/60/1	5-15P	8'	72" (1829 mm)	30" (762 mm)	37-7/8" (939.8 mm)	455 (207 k)	81 (2.01 m³)
	FST-72-18	3	18	3	6.7	1/3	115/60/1	5-15P	8'	72" (1829 mm)	30" (762 mm)	37-7/8" (939.8 mm)	455 (207 kg)	81 (2.01 m³)

* Depth does not include 1" bumper.

** Height does not include 4" castors (5" overall) or 6" optional legs.

13105 NW 47th Ave. Miami FL 33054

Tollfree: (866) 463 2467 Ph: (305) 779 0170 Fax: (305) 779 0173

www.fagorcommercial.com

TOGETHER WE EVOLVE

Specifications FST Series

Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor. Aluminum split wall between the food pans and the interior cavity. Door is heavy duty stainless steel exterior and high impact ABS plastic interior, instep design with stainless steel hinged solid doors and positive seal. Provided with magnetic door gaskets, removable without tools, self-closing and with 120° stay open feature. Recessed full length door handle. Door openings have a plastic breaker strips to retard condensate formation.

Unit comes complete with a 2" CFC-Free polyurethane insulation, foamed in place.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-134a refrigerant. Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Tables are designed to maintain temperatures between 33° F to 38° F in the interior cabinet and 41° F in the top rail.

Features

10" wide removable and reversible cutting board, NSF approved white polyethylene, 1/2 deep.

Stainless steel insulated hood and top lid keeps pan contents colder. Durable, long lasting and removable for easy cleaning.

Comes standard with standard 1/6 size, (FST-27-8 standard with (6) 1/6 size & (2) 1/9 size) clear polycarbonate, NSF approved 4" deep food pans and adaptor bars.

Shelving


(1) Epoxy coated shelving per door with clips. Adjustable in 1/2" increments per shelf.

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p). Standard 4" diameter casters, front 2 with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

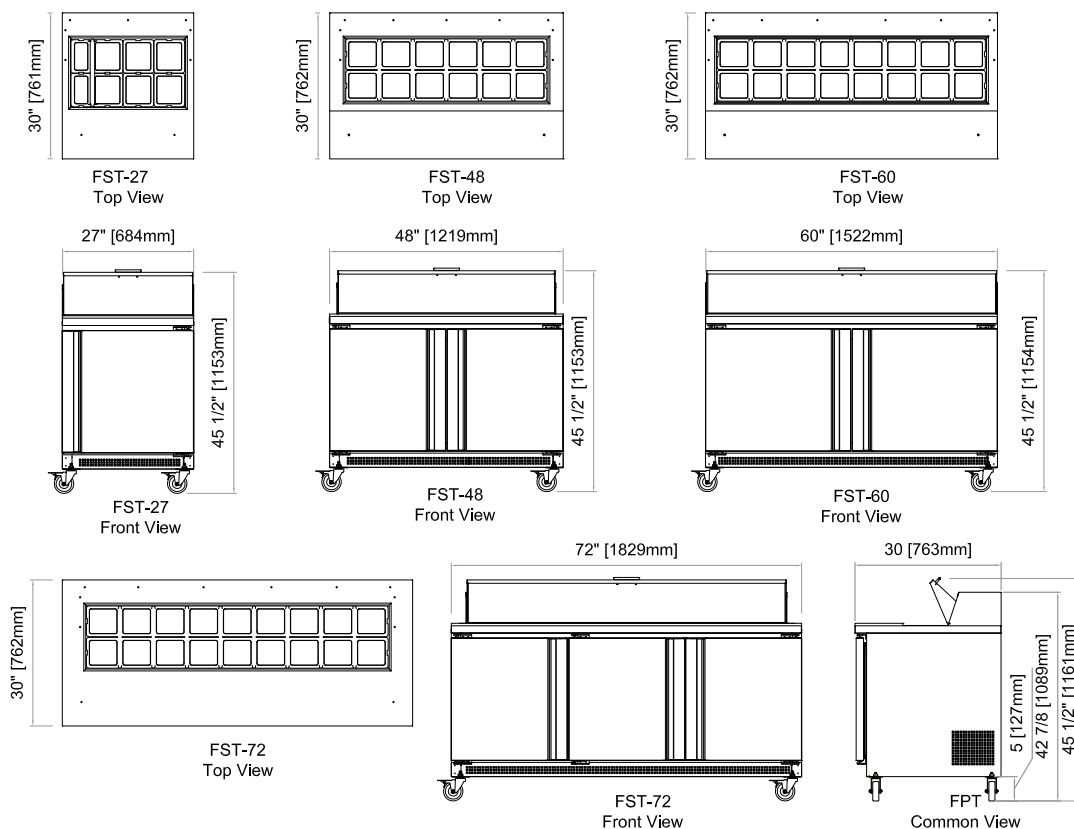

The manufacturer reserves the rights to modify materials and specifications without notice.



Salad / Sandwich Tables

FST Series **New!**

FST-27-8-N

FST-36-10-N

FST-48-12-N

FST-60-16-N

FST-72-18-N

(800) 777-9129

FAGOR



Item # _____

Standard Features

- Our new "Next Generation" prep table have been completely re-designed to ensure proper temperature even in **100 deg. environments.**
- Exclusive base design for over **30% greater interior capacity** than most in it's class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- Heavy duty stainless steel door with full length recessed door handles; interior step design for added insulation and protection of door gasket.
- Forced air design **underneath the pans** to keep products fresh and maintain temperature at 33° - 41°F in food pans and cabinet interior. Split design with an aluminum divider wall between the food pans and the interior cabinet. Complies with NSF7 standards for food product safety.
- Insulated hood and lid skeeps pan temperature cold and minimizes condensation. 10" full length removable and reversible cutting board.
- Standard with full sets of 1/6 size pans, clear polycarbonate, 4" deep / will accommodate 6" deep pans.



FST-27-8-N



FST-48-12-N



FST-72-18-N

Options & Accessories

- Flat cover in lieu of telescoping cover
- Epoxy coated shelves
- Pan dividers
- Single and double tier overshell
- 220 volts / 50 cycles / 1 phase



* Conforms to UL & NSF-7 standards

Salad Tables	Model	Door	Top Pans	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions L / D / H			Shipping (Wt. Cubes)	
	FST-27-8-N	1	8	1	2.7	1/6	115	5-15P	8'	27-3/4"	30-1/8"	44-5/8"	205	36
	FST-36-10-N	2	10	2	2.7	1/6	115	5-15P	8'	36-3/8"	30-1/8"	44-5/8"	258	46
	FST-48-12-N	2	12	2	3.8	1/4	115	5-15P	8'	48-3/8"	30-1/8"	44-5/8"	297	55
	FST-60-16-N	2	16	2	3.8	1/4	115	5-15P	8'	60-3/8"	30-1/8"	44-5/8"	342	73
	FST-72-18-N	3	18	3	3.8	1/4	115	5-15P	8'	72-1/2"	30-1/8"	44-5/8"	405	87

* Depth does not include 1" bumper. // Specifications are subject to change without notice.

Salad / Sandwich Tables

FST Series

(800) 777-9129



Specifications

Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor. Aluminum split wall between the food pans and the interior cavity. Door is heavy duty stainless steel exterior and interior, step design with stainless steel hinged solid doors and positive seal. Provided with magnetic door gaskets, removable without tools, self-closing and with 120° stay open feature. Recessed full length door handle. Door openings have a plastic breaker strips to retard condensate formation. Unit comes complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration system

Self-contained capillary tube system using

environmentally friendly (CFC Free) R-134a refrigerant. Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Tables are designed to maintain temperatures between 33° F to 38° F in the interior cabinet and 41° F in the top rail.

Features

10" wide removable and reversible cutting board, NSF approved white polyethylene, 1/2 deep.

Stainless steel insulated hood and top lid keeps pan contents colder. Durable, long lasting and removable for easy cleaning.

Comes standard with standard 1/6 size, clear polycarbonate, NSF approved 4" deep food pans and adaptor bars.

Shelving


(1) Epoxy coated shelving per door with clips. Adjustable in 1/2" increments per shelf.

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p). Standard 5" diameter casters, front 2 with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

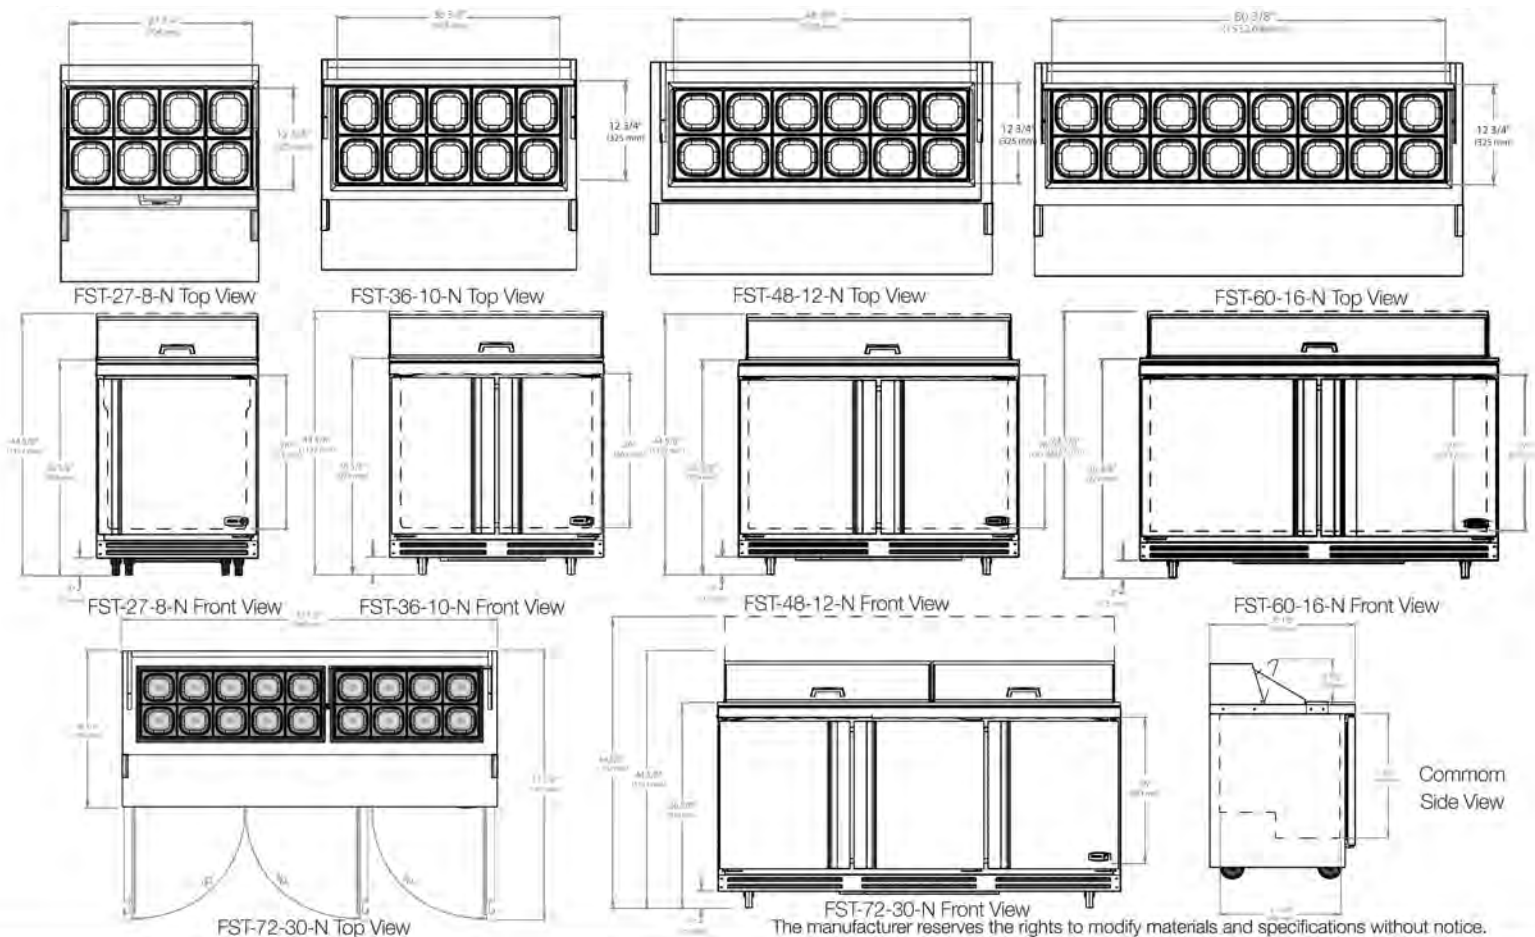

MegaTop Refrigeration Table

FMT Series **New!**

FMT-27-12-N FMT-36-15-N FMT-48-18-N
FMT-60-24-N FMT-72-30-N

(800) 777-9129



Item # _____

Standard Features

- Our new "Next Generation" prep table have been completely re-designed to ensure proper temperature even in **100 deg. environments.**
- Exclusive base design for over **30% greater interior capacity** than most in it's class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- Heavy duty stainless steel door with full length recessed door handles; interior step design for added insulation and protection of door gasket.
- Forced air design **underneath the pans** to keep products fresh and maintain temperature at 33° - 41°F in food pans and cabinet interior. Split design with an aluminum divider wall between the food pans and the interior cabinet. Complies with NSF7 standards for food product safety.
- Insulated hood and lid skeeps pan temperature cold and minimizes condensation. 10" full length removable and reversible cutting board.
- Standard with full sets of 1/6 size pans, clear polycarbonate, 4" deep / will accommodate 6" deep pans.



FMT-27-12-N



FMT-48-18-N



FMT-72-30-N



Options & Accessories

- Flat cover in lieu of telescoping cover
- Epoxy coated shelves (clips included)
- Pan dividers
- Single and double tier overshell
- 220 volts / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards

Mega Top	Model	Door	Top Pans	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions L / D / H			Shipping (Wt. Cubes)	
	FMT-27-12-N	1	12	1	2.7	1/6	115	5-15P	8'	27-3/4"	36-1/8"	44-5/8"	225	36
	FMT-36-15-N	2	15	2	2.7	1/6	115	5-15P	8'	36-3/8"	36-1/8"	44-5/8"	258	46
	FMT-48-18-N	2	18	2	5	1/4	115	5-15P	8'	48-3/8"	36-1/8"	44-5/8"	327	55
	FMT-60-24-N	2	24	2	5	1/4	115	5-15P	8'	60-3/8"	36-1/8"	44-5/8"	380	73
	FMT-72-30-N	3	30	3	5	1/4	115	5-15P	8'	72-1/2"	36-1/8"	44-5/8"	465	87

* Depth does not include 1" bumper. // Specifications are subject to change without notice.

Specifications

Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor. Aluminum split wall between the food pans and the interior cavity. Door is heavy duty stainless steel exterior and interior, step design with stainless steel hinged solid doors and positive seal. Provided with magnetic door gaskets, removable without tools, self-closing and with 120° stay open feature. Recessed full length door handle. Door openings have a plastic breaker strips to retard condensate formation. Unit comes complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration system

Self-contained capillary tube system using environmentally friendly (CFC Free) R-134a

refrigerant. Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Tables are designed to maintain temperatures between 33° F to 38° F in the interior cabinet and 41° F in the top rail.

Features

10" wide removable and reversible cutting board, NSF approved white polyethylene, 1/2 deep.

Stainless steel insulated hood and top lid keeps pan contents colder. Durable, long lasting and removable for easy cleaning.

Comes standard with standard 1/6 size, clear polycarbonate, NSF approved 4" deep food pans and adaptor bars.

Shelving


(1) Epoxy coated shelving per door with clips. Adjustable in 1/2" increments per shelf.

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p). Standard 5" diameter casters, front 2 with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

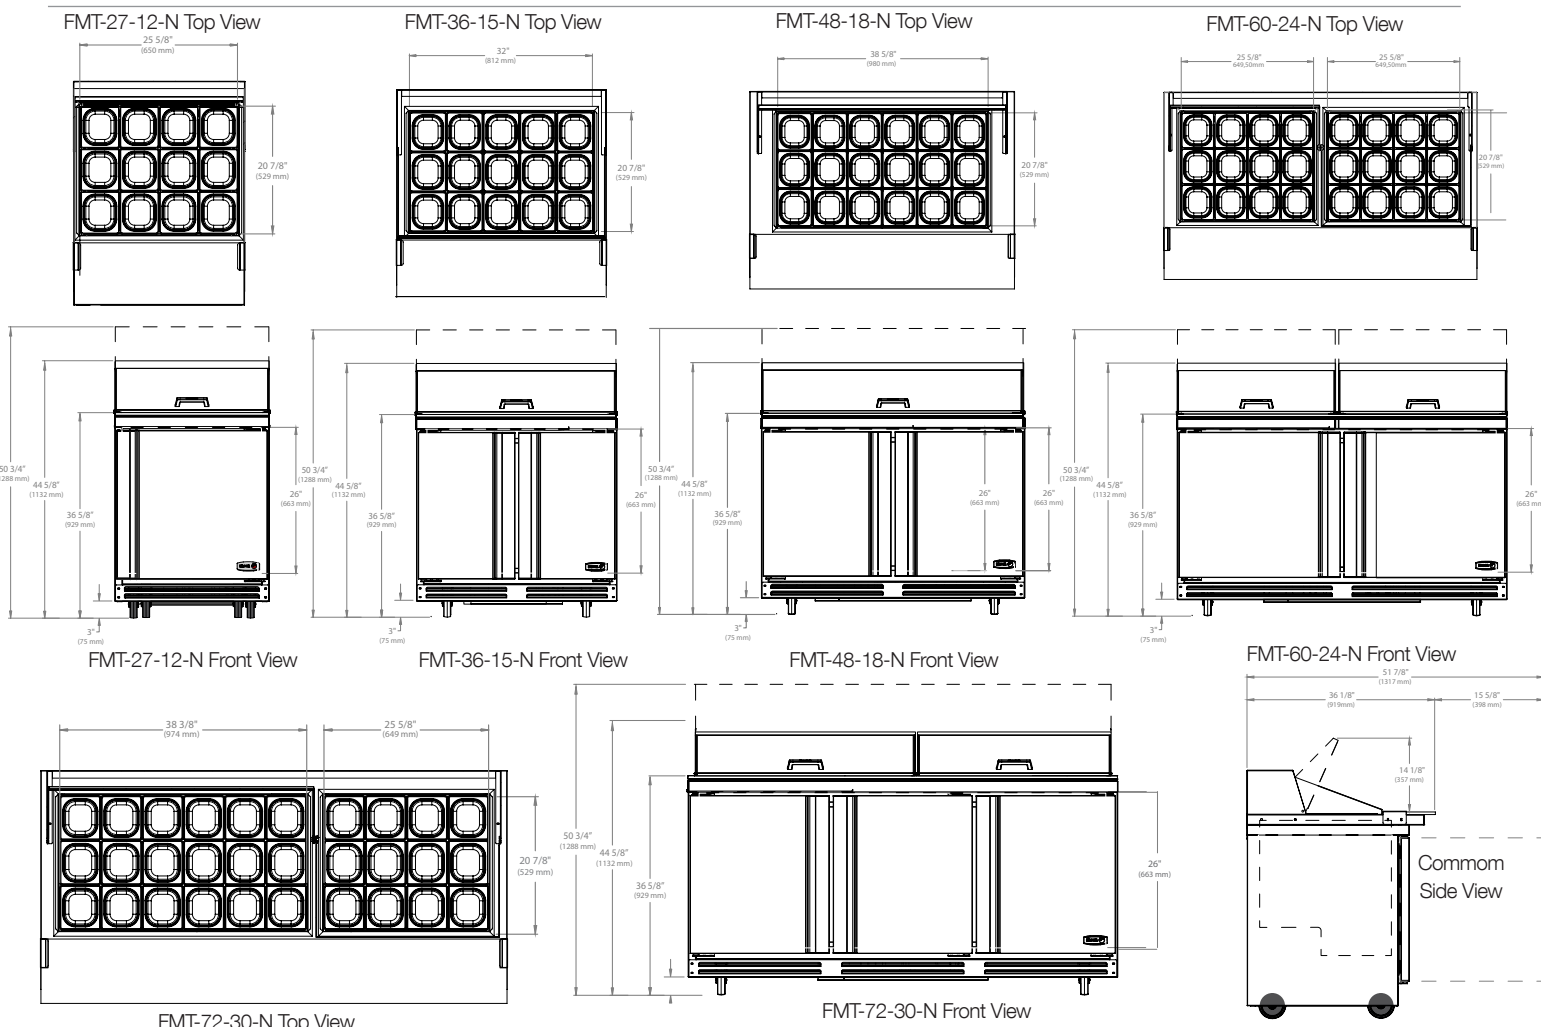

The manufacturer reserves the rights to modify materials and specifications without notice. 03012018

Refrigerated Chef Base FCBR Series

(800) 777-9129



FCBR-52 FCBR-52-60 FCBR-72
FCBR-84 FCBR-96

Item # _____

Standard Features

- Our chef bases are designed with durability and strength that you will not find in any other products in its class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements. Drip resistant "V" marine edge protects against spills.
- Drawers: Heavy duty drawer slides, full length recessed drawer handles; accommodate: FCBR-52 (2) 12" x 20" x 4" / (3) 1/6 th x 4" deep pans per drawer. FCBR-60/96 (3) 12" x 20" x 4" deep pans per drawer. FCBR-72 (2) 12" x 20" x 4" deep pans per drawer. FCBR-84 (3) 12" x 20" on right drawer / (2) 12" x 20" x 4" deep pans on the left drawer. (pans sold separately).
- **Forced air inside** to keep products fresher and maintain a constant temperature between **32°F to 41°F** in refrigeration equipment.
- Enhanced digital controller to keep food quality for longer period of time.
- Side breathing refrigeration system for built-in applications.
- **2" Ecomate** CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion (ODP) and zero global warming potential (GWP).
- Equipment mounted on heavy duty **4" casters**.



FCBR-52



FCBR-52-60



FCBR-96



Options & Accessories

- 6" Adjustable legs
- 220 volts / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards

Chef Base	Model	Drawers	Pans	Cord Length	HP	Volt	Amps	NEMA Plug	Cabinet Dimensions L"/D"/H			Shipping (Wt. Cubes)	
	FCBR-52	2	36	8'	1/6	115	2.7	5-15P	53"	32"	25-3/8"	380	38
	FCBR-52-60	2	36	8'	1/6	115	2.7	5-15P	60"	32"	25-3/8"	410	43
	FCBR-72	4	48	8'	1/4	115	5	5-15P	72-1/2"	32"	25-3/8"	515	51
	FCBR-84	4	60	8'	1/4	115	5	5-15P	84"	32"	25-3/8"	560	59
	FCBR-96	4	72	8'	1/4	115	5	5-15P	96-5/8"	32"	25-3/8"	640	66

* Depth does not include 1" bumper / All specifications are subject to change without notice.

Refrigerated Chef Base FCBR Series

(800) 777-9129

FAGOR



Specifications

Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor. Drawer is heavy duty stainless steel with heavy duty drawer slides, self closing. Accommodates: FCBR-52 (2) 12" x 20" x 4" / (3) 1/6 th x 4" deep pans per drawer. FCBR-60/96 (3) 12" x 20" x 4" deep pans per drawer. FCBR-72 (2) 12" x 20" x 4" deep pans per drawer. FCBR-84 (3) 12" x 20" on right drawer / (2) 12" x 20" x 4" deep pans on the left drawer. (pans sold separately).

Drawers provided with magnetic door gaskets, removable without tools, self-closing. Drawers are full extension. Recessed full length handles.

Unit comes complete with a 2" Ecomate CFC-

Free polyurethane insulation, foamed in place.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-290 refrigerant. Side mounted compressor on right side for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Tables are designed to maintain temperatures between 33° F to 38° F in the interior cabinet.


Energy savings digital controllers and thermostats. Automatic defrost, time initiated.

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p).

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

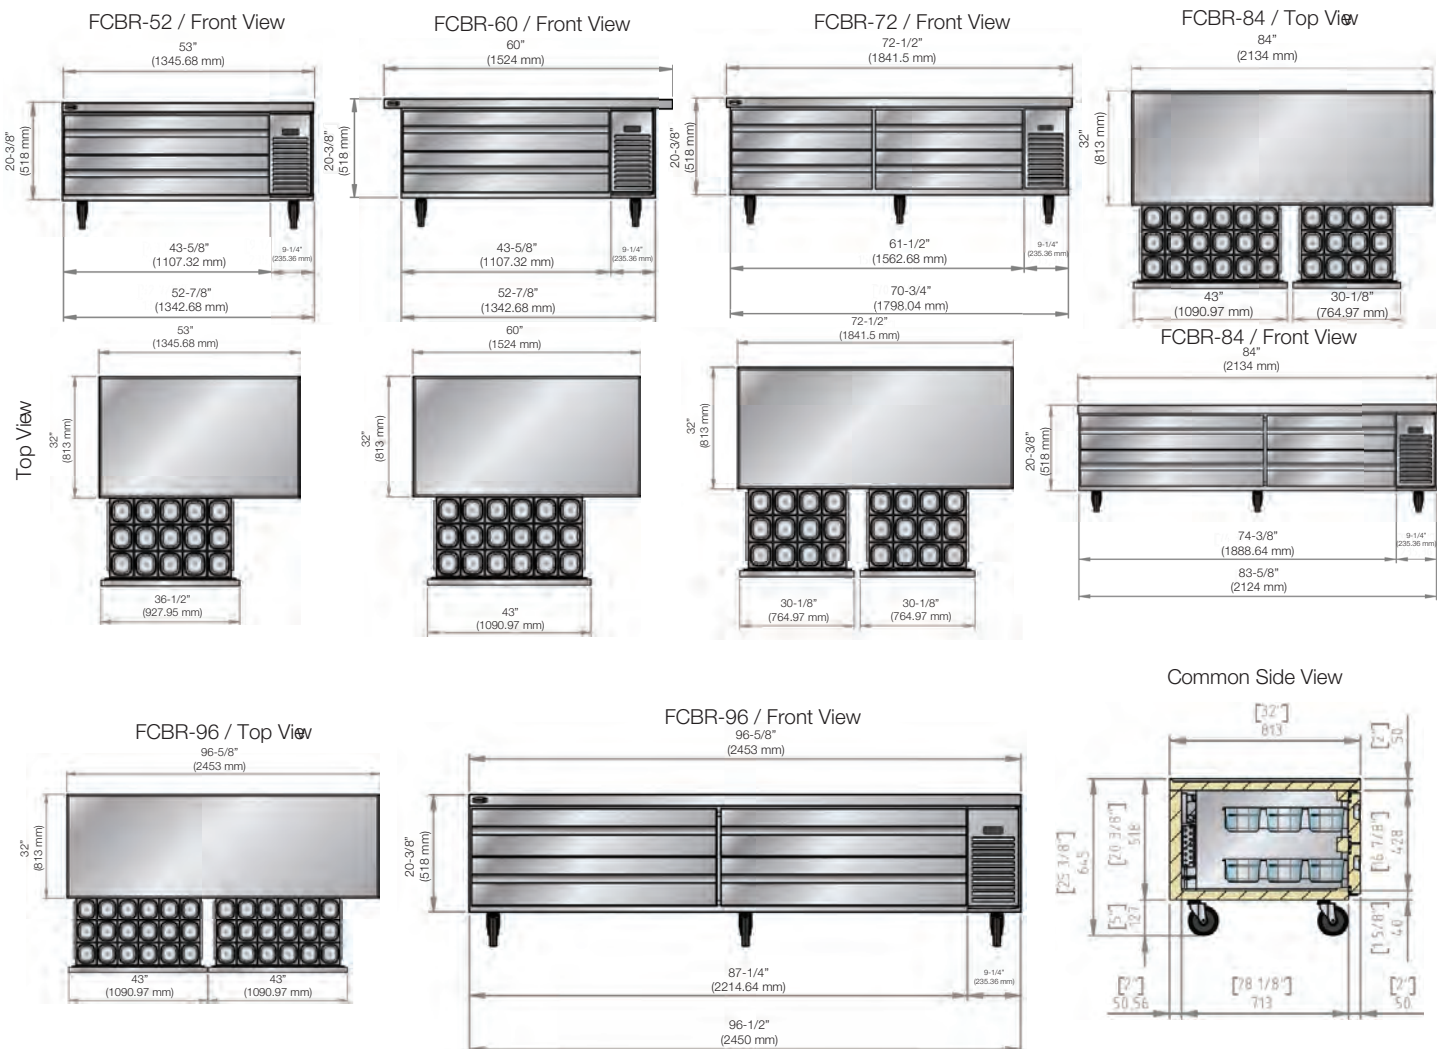

The manufacturer reserves the rights to modify materials and specifications without notice. 03012018

Pizza Prep Tables

FPT Series

FPT-46

FPT-67

FPT-93

(800) 777-9129

FAGOR



Item # _____

Standard Features

- Our pizza units are designed with durability and strength that you will not find in any other products in its class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- Heavy duty stainless steel door with full length recessed door handles; interior instep design for added insulation and protection of door gasket.
- Forced air design underneath the pans to keep products fresh and maintain temperature at 33° - 41°F in food pans and cabinet interior. Complies with NSF7 standards for food product safety.
- Insulated lid keeps pan temperature cold and minimizes condensation. Removable for easy cleaning.
- Side breathing refrigeration system for built-in applications.
- Standard with rail system which holds (2) shelves per door and rails that can also accommodate (2) 12" x 20" foodservice pans (pans sold separately).
- 19" full length removable and reversible white polyethylene cutting board.



FPT-46



FPT-67



FPT-93

Options & Accessories

- 6" adjustable legs (set of 4)
- Additional epoxy coated shelves with channels
- Universal tray slides (pair)
- 220 volts / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards

Pizza Tables	Model	Door	Shelves	Top Pans	HP	Volts	Amps	Capacity (cu. ft.)	Cord Length	Cabinet Dimensions L / * D / ** H			Shipping (Wt. / Cubes)	
	FPT-46	1	2	6	1/4	115	5	9.9	8'	46"	35"	43-7/8"	328	63
	FPT-67	2	4	9	1/4	115	5	18.6	8'	67-1/4"	35"	43-7/8"	450	73
	FPT-93	3	6	12	1/3	115	6.5	26.5	8'	93-1/8"	35"	43-7/8"	570	92

* Depth does not include 1" bumper.

** Height does not include 5" casters (6" overall) or 6" optional legs.

All specifications are subject to change without notice.

Pizza Prep Tables

FPT Series

(800) 777-9129



Specifications

Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor. Door is heavy duty stainless steel exterior and interior, in-step design with hinged solid doors and positive seal. Provided with magnetic door gaskets, removable without tools, self-closing and with 120° stay open feature. Recessed full length door handle.

Door openings have a plastic breaker strips to retard condensate formation. Unit comes complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-134a

refrigerant. Side mounted compressor on right side for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Tables are designed to maintain temperatures between 33° F to 38° F in the interior cabinet and 41° F in the top rail.

Features

19" wide removable and reversible cutting board, NSF approved white polyethylene, ½ deep. Stainless steel insulated top lid keeps pan contents colder. Durable, long lasting and removable for easy cleaning.

Comes standard with standard 1/3 size, clear polycarbonate, NSF approved 4" deep food pans.

Shelving








(2) Epoxy coated shelving per door with channel slides for supports. Adjustable in 2" increments per shelf.

Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p). Standard with 5" diameter casters, front two with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

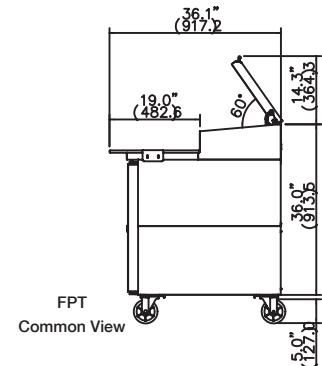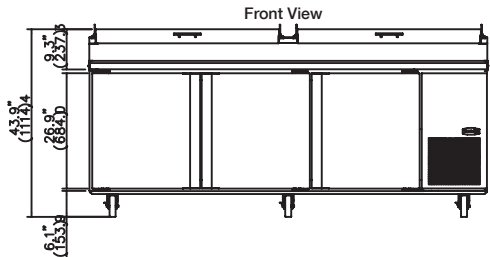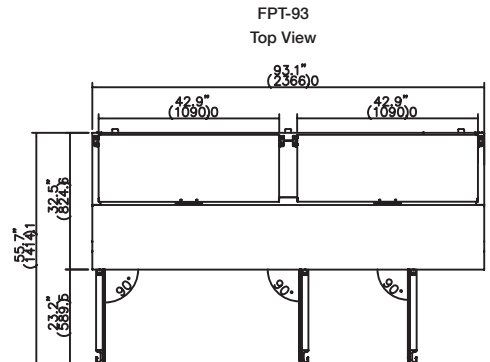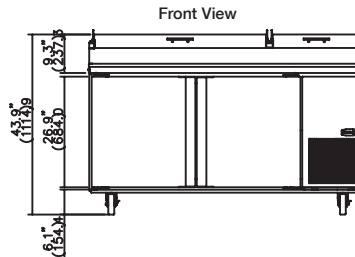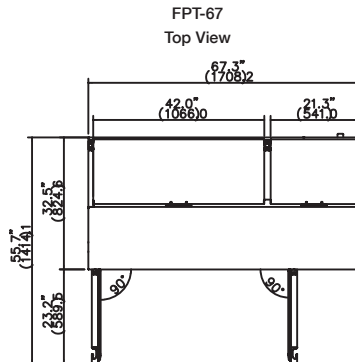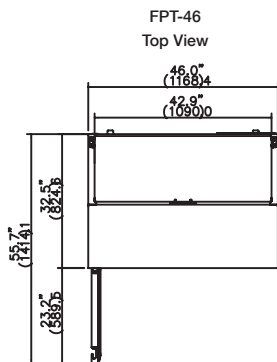

The manufacturer reserves the rights to modify materials and specifications without notice. 03012018