



TUBING, FITTINGS & CLAMPS



POLYESTER-REINFORCED POLYETHYLENE BEVERAGE HOSE

170 Series Bevlex® Polyester-Reinforced Polyethylene Beverage Hose LLDPE core tube construction

Part Number	Nominal ID	Nominal OD	Length	Clamp Size	Tracer Yarn Color
170-04102-77	.265"	.457"	100'	13.3	White
170-04122-77	.265"	.457"	100'	13.3	Blue
170-04502-00	.265"	.457"	500'	13.3	White
170-04506-00	.265"	.517"	500'	14.0	White
170-04512-00	.265"	.457"	500'	13.3	Red
170-04522-00	.265"	.457"	500'	13.3	Blue
170-06100-77	.380"	.635"	100'	17.0	White
170-06300-00	.380"	.593"	300'	15.7	White
170-06500-00	.380"	.593"	500'	15.7	White
170-08100-77	.510"	.740"	100'	19.8	White
170-08300-00	.510"	.740"	300'	19.8	White

provides excellent resistance to stress cracking. Polyester reinforcement provides pressure performance and kink-resistance exceeding that of simple tubing. Bonded abrasion-resistant copolymer jacket will not separate or ripple in tight bends or during installation in conduits. Made from food-grade materials and is NSF 51/61 certified. Phthalate free.



172 Series Bev-Flex® Polyester-Reinforced Polyethylene Beverage Hose features the same

Part Number	Nominal ID	Nominal OD	Length	Clamp Size	Tracer Yarn Color
172-04102-77	.265"	.457"	100'	12.3	White
172-04112-77	.265"	.457"	100'	12.3	Red
172-04122-77	.265"	.457"	100'	12.3	Blue
172-04502-00	.265"	.457"	500'	12.3	White
172-04503-00	.265"	.420"	500'	11.3	White
172-04512-00	.265"	.457"	500'	12.3	Red
172-04522-00	.265"	.457"	500'	12.3	Blue
172-04804-00	.250"	.385"	800'	10.5	White
172-06100-77	.380"	.593"	100'	15.7	White
172-06110-77	.380"	.593"	100'	15.7	Red
172-06120-77	.380"	.593"	100'	15.7	Blue
172-06300-00	.380"	.593"	300'	15.7	White
172-06303-00	.380"	.537"	300'	14.5	White
172-06310-00	.380"	.593"	300'	15.7	Red
172-06320-00	.380"	.593"	300'	15.7	Blue
172-06520-00	.380"	.593"	500'	15.7	Blue
172-08100-77	.510"	.740"	100'	19.8	White
172-08300-00	.510"	.740"	300'	19.8	White

construction as the 170 Series, but instead has a Smooth EVA (ethylene vinyl acetate) cover that provides increased flexibility. Made from food-grade materials is NSF 51/61 certified. Phthalate free.



175 Series Bev-Seal Ultra® Barrier Hose Dual barrier construction: seamless extruded barrier layer in

Part Number	Nominal ID	Nominal OD	Length	Clamp Size	Tracer Yarn Color
175-04500-00	.235"	.420"	500'	11.3	White
175-06300-00	.375"	.535"	300'	14.5	White
175-08300-00	.510"	.675"	300'	18.5	White
175-C4110-00	.265"	.420"	100'	11.3	Red
175-C4510-00	.265"	.420"	500'	11.3	Red
175-C6310-00	.375"	.535"	300'	14.5	Red
175-C61B0-10	.375"	.535"	100'	14.5	Black Jacketed
175-C81B0-10	.510"	.675"	100'	18.5	Black Jacketed

a polyolefin core tube, reinforced with polyester yarn and protected by a smooth EVA cover. Glas-Flex™ liner allows changeovers from even the most pungent flavors with simple flushing procedures. NSF-51/61. Phthalate free.






TUBING, FITTINGS & CLAMPS

BARRIER BEVERAGE TUBING

235 Series Bev-Seal Ultra® Barrier Tubing - offers unsurpassed oxygen and flavor protection combined with flushability in a coextruded tube. Flushable Glas-Flex™ liner allows change-overs from even the most pungent flavors with simple flushing procedures. Dual-Barrier construction: flushable Glas-Flex™ inner liner surrounded by a seamless extruded barrier layer in a coextruded polyolefin tube. NSF 51/61. Phthalate free.

Part Number	Nominal ID	Nominal OD	Length	Clamp Size
235-05620-XX	.190"	.313"	500'	8.7
235-06620-XX	.265"	.375"	500'	10.0
235-07620-XX	.320"	.438"	500'	12.3
235-08620-XX	.380"	.500"	500'	14.0
235-10620-XX	.510"	.625"	500'	17.0

Add "X5K" to a model part number to specify a 5,000 foot roll. Tubing is available with number markings, replace "XX" with the corresponding number in the table below.

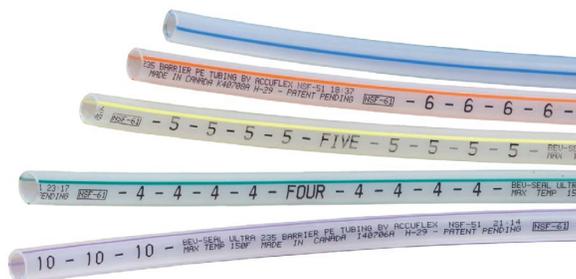

Number	Tracer	Number	Tracer	Number	Tracer	Number	Tracer
00	Unnumbered	04	Green	08	White	12	Red
01	Blue	05	Yellow	09	Pink	13	Green
02	Black	06	Orange	10	Purple	14	Yellow
03	Red	07	Brown	11	Black	15	Orange
						16	Brown

CABLED BARRIER TUBING BUNDLE

974 Series Bev-Seal Ultra® Cabled Barrier Tubing Bundle is constructed with flushable Bev-Seal Ultra® Series 235 tubes, each color coded, individually numbered and branded with NSF-51 and NSF-61 listings and date codes for traceability. Special film wrap over cabled tubes offers excellent flexibility and tight bend capabilities. Silver-gray extruded jacket, with slip agent to minimize friction, is branded with product identification, NSF listing marks, and sequential footage markings for ease of measurement.

Part Number	Line Description	Max Bundle OD	Nominal ID	Nominal OD	Bend Radius	Clamp Size
974-00040-01	(4) 3/8" Bev-Seal Ultra 235 Syrup Tubes	.380"	.380"	.500"		14.0
974-00060-01	(6) 3/8" Bev-Seal Ultra 235 Syrup Tubes	.380"	.380"	.500"		14.0
974-00080-01	(8) 3/8" Bev-Seal Ultra 235 Syrup Tubes	2"	.380"	.500"	8"	14.0
974-00100-01	(10) 3/8" Bev-Seal Ultra 235 Syrup Tubes	2.2"	.380"	.500"	9"	14.0
974-00120-01	(12) 3/8" Bev-Seal Ultra 235 Syrup Tubes	2.2"	.380"	.500"	10"	14.0
974-00140-01	(14) 3/8" Bev-Seal Ultra 235 Syrup Tubes	2.6"	.380"	.500"	10"	14.0
974-00160-01	(16) 3/8" Bev-Seal Ultra 235 Syrup Tubes	3.0"	.380"	.500"	12"	14.0
974-17000-01	(17) 1/4" Bev-Seal Ultra 235 Liquor Tubes	.265"	.265"	.375"		10.0
974-07010-01	(7) 1/4" Bev-Seal Ultra 235 Syrup Tubes	1.5"	.265"	.375"	5"	10.0
974-08020-01	(1) 3/8" Bev-Seal Ultra 235 Syrup Tubes	.380"	.380"	.500"		14.0
974-08020-01	(8) 1/4" Bev-Seal Ultra 235 Syrup Tubes	1.7"	.265"	.375"	6"	10.0
974-08020-01	(2) 3/8" Bev-Seal Ultra 235 Syrup Tubes	.380"	.380"	.500"		14.0
974-08040-01	(8) 1/4" Bev-Seal Ultra 235 Syrup Tubes	2.0"	.265"	.375"	7"	10.0
974-08040-01	(4) 3/8" Bev-Seal Ultra 235 Syrup Tubes	.380"	.380"	.500"		14.0
974-10020-01	(10) 1/4" Bev-Seal Ultra 235 Syrup Tubes	2.0"	.265"	.375"	7"	10.0
974-10020-01	(2) 3/8" Bev-Seal Ultra 235 Syrup Tubes	.380"	.380"	.500"		14.0
974-10040-01	(10) 1/4" Bev-Seal Ultra 235 Syrup Tubes	2.2"	.265"	.375"	8"	10.0
974-10040-01	(4) 3/8" Bev-Seal Ultra 235 Syrup Tubes	.380"	.380"	.500"		14.0

Other jacket colors available. Replace "-01" at the end of the model number with "-02" for 200' lengths and "-05" for 500' lengths.





TUBING, FITTINGS & CLAMPS

CABLED BARRIER TUBING BUNDLE CONTINUED

Part Number	Line Description	Max Bundle OD	Nominal ID	Nominal OD	Bend Radius	Clamp Size
974-06000-01W	(6) 1/4" Bev-Seal Ultra 235 Syrup Tubes, White Jacket		.265"	.375"		10.0
974-06000-02S	(6) 1/4" Bev-Seal Ultra 235 Syrup Tubes, Silver Jacket		.265"	.375"		10.0
974-08020-01S	(8) 1/4" Bev-Seal Ultra 235 Syrup Tubes, Black Jacket	1.7	.265"	.375"	6"	10.0
	(2) 3/8" Bev-Seal Ultra 235 Syrup Tubes, Black Jacket		.380"	.500"		14.0

Other jacket colors available. Replace "-01" at the end of the model number with "-02" for 200' lengths and "-05" for 500' lengths.



CABLED BARRIER TUBING/HOSE BUNDLE

974H Series Bev-Seal Ultra® Cabled Barrier Tubing/Hose Bundle is constructed of flushable Bev-Seal Ultra® 235 Series syrup tubes, each color coded, individually numbered and branded with date codes for traceability. In each configuration, there are 3/8" ID PET lined Bevlex® Plus 180 Series hoses specifically included to carry water at pressures up to 300 psig at 70°F. In addition one 1/4" ID polyethylene Bev-Seal® 176 Series hose has been included to carry carbon dioxide gas at pressures up to 250 psig at 70°F. The cable construction and silver-gray "low-friction" extruded jacket allows for convenient one-step installation. All component lines carry NSF-51 and NSF-61 listings and are branded accordingly. Sequential footage marks on the bundle jacket add to the ease of installation.

Part Number	Line Description	Max Bundle OD	Nominal ID	Nominal OD	Bend Radius	Clamp Size
	(8) 3/8" Bev-Seal Ultra 235 Syrup Tubes		.380"	.500"		14.0
974H-00080012-01	(2) 3/8" Bevlex Plus 180 Water Hoses	2.2"	.375"	.593"	9"	15.7
	(1) 1/4" Bev-Seal 176 Gas hose		.265"	.457"		13.3
	(8) 3/8" Bev-Seal Ultra 235 Syrup Tubes		.380"	.500"		14.0
974H-08000014-01	(4) 3/8" Bevlex Plus 180 Water Hoses		.375"	.593"		15.7
	(1) 1/4" Bev-Seal 176 Gas hose		.265"	.457"		13.3
	(10) 3/8" Bev-Seal Ultra 235 Syrup Tubes		.380"	.500"		14.0
974H-00100012-01	(2) 3/8" Bevlex Plus 180 Water Hoses	2.3"	.375"	.593"	10"	15.7
	(1) 1/4" Bev-Seal 176 Gas hose		.265"	.457"		13.3
	(10) 3/8" Bev-Seal Ultra 235 Syrup Tubes		.380"	.500"		14.0
974H-00100012x250	(2) 3/8" Bevlex Plus 180 Water Hoses	2.3"	.375"	.593"	10"	15.7
	(1) 1/4" Bev-Seal 176 Gas hose		.265"	.457"		13.3
	(12) 3/8" Bev-Seal Ultra 235 Syrup Tubes		.380"	.500"		14.0
974H-00120012-01	(2) 3/8" Bevlex Plus 180 Water Hoses	2.5"	.375"	.593"	12"	15.7
	(1) 1/4" Bev-Seal 176 Gas hose		.265"	.457"		13.3
	(14) 3/8" Bev-Seal Ultra 235 Syrup Tubes		.380"	.500"		14.0
974H-00140012-01	(2) 3/8" Bevlex Plus 180 Water Hoses	2.6"	.375"	.593"	13"	15.7
	(1) 1/4" Bev-Seal 176 Gas hose		.265"	.457"		13.3
	(16) 3/8" Bev-Seal Ultra 235 Syrup Tubes		.380"	.500"		14.0
974H-00160012-01	(2) 3/8" Bevlex Plus 180 Water Hoses	2.8"	.375"	.593"	14"	15.7
	(1) 1/4" Bev-Seal 176 Gas hose		.265"	.457"		13.3
	(10) 1/4" Bev-Seal Ultra 235 Syrup Tubes		.265"	.457"		13.3
974H-10000002-01	(2) 3/8" Bevlex Plus 180 Water Hoses	2.5"	.375"	.593"		15.7

Replace "-01" at the end of the model number with "-02" for 200' lengths and "-05" for 500' lengths.





TUBING, FITTINGS & CLAMPS

CABLED BARRIER TUBING BUNDLE

975 Series Bev-Seal Ultra® Cabled Barrier Tubing Bundle is constructed with flushable, dual barrier Bev-Seal Ultra® Series 175 yarn-reinforced tubes that protect oxygen-sensitive beverages, like juices, from flavor degradation, and allow quick flavor changes, including pungent flavors. Special film wrap over cabled tubes offers excellent flexibility and tight bend capabilities. Red extruded jacket, with slip agent to minimize friction, is branded with product identification, NSF listing marks, and sequential footage markings for ease of measurement. NSF 51/61 certified. Phthalate free.

Part Number	Line Description	Max Bundle OD	Nominal ID	Nominal OD	Bend Radius	Clamp Size
975-C0010000-01	(10) 3/8" Bev-Seal Ultra 175 Syrup Tubes, Red Jacket	2.5"	.375"	.535"	10"	14.5
975-C0012000-01	(12) 3/8" Bev-Seal Ultra 175 Syrup Tubes, Red Jacket	2.5"	.375"	.535"	10"	14.5
975-0012000-02B	(12) 3/8" Bev-Seal Ultra 175 Syrup Tubes, Black Jacket	2.5"	.375"	.535"	10"	14.5
975-C0014000-01	(14) 3/8" Bev-Seal Ultra 175 Syrup Tubes, Red Jacket	2.8"	.375"	.535"	12"	14.5
975-1400000-05B	(14) 1/4" Bev-Seal Ultra 175 Syrup Tubes, Black Jacket		.265"	.420"		11.3
975-C0012020-01	(12) 3/8" Bev-Seal Ultra 175 Syrup Tubes, Red Jacket	2.8"	.375"	.535"	12"	14.5
	(2) 1/2" Bev-Seal Ultra 175 Syrup Tubes, Red Jacket		.510"	.675"		18.5
975-CB0014020-02	(14) 3/8" Bev-Seal Ultra 175 Syrup Tubes, Red Jacket		.375"	.535"		14.5
	(2) 1/2" Bev-Seal Ultra 175 Syrup Tubes, Red Jacket		.510"	.675"		18.5

Other jacket colors available. Replace "-01" at the end of the model number with "-02" for 200' lengths and "-05" for 500' lengths.




CABLED BARRIER FIRE RESISTANT TUBING BUNDLE

975FR Series Bev-Seal Ultra® Cabled Barrier Tubing Bundle is constructed with flushable, dual barrier Bev-Seal Ultra® Series 175 yarn-reinforced tubes that fire resistant hoses, individually branded with NSF-51 and NSF-61 listings, and date codes for traceability. Each hose incorporates extruded layers of fire resistant non-halogen polyolefin compound. Special metallized film wrap over the hoses, plus an outer wrap of white fiberglass tape. When tested in accordance with ASTM E84/UL 723 Test for Surface Burning Characteristics of Building Materials (modified to test a single round of beverage bundle), the Flame Spread Index (FSI) and Smoke Developed Index (SDI) are less than 25 and 50 respectively, in compliance with Class 1 or "A" requirements and plenum requirements.

Part Number	Line Description	Max Bundle OD	Nominal ID	Nominal OD	Bend Radius	Clamp Size
	(10) Bev-Seal Ultra 175FR Syrup Tubes		3/8"	.535"		14.5
975FR-00100012-01	(2) 180FR Barrier Water Hoses	2.1"	3/8"	.593"	14"	15.7
	(1) 176FR Gas Hose		1/4"	.457"		13.3

Replace "-01" at the end of the model number with "-02" for 200' lengths and "-05" for 500' lengths.

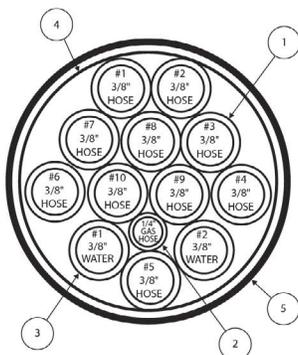

- 975FR-00100012-01/-02/-05**
- 10 x 3/8" I.D. x .535" O.D. F/R BARRIER HOSES (#1 - #10) FOR SODA OR PUNGENT FLAVOR SYRUP (e.g. ROOT BEER) (14.5 Clamp Size)
 - 1 x 1/4" I.D. x .457" O.D. F/R GAS HOSE (13.3 Clamp Size)
 - 2 x 3/8" I.D. x .593" O.D. F/R BARRIER "WATER" HOSES (15.7 Clamp Size)
 - ALUMINUM WRAP
 - FIBERGLASS WRAP





TUBING, FITTINGS & CLAMPS

INSULATED BARRIER TUBING BUNDLE

973 Series Bev-Seal Ultra® Insulated Barrier Tubing Bundle is comprised of flushable Bev-Seal Ultra® Series 235 syrup barrier tubes, each color coded, individually numbered, and red and blue Series 221 LLDPE coolant tubes strategically placed and designed to provide optimum cooling. A tear-resistant aluminized film wrap over the group of tubes further enhances the insulating properties of the 3/4" thick tubular foam sleeve. A black extruded jacket with slip agent to minimize friction is branded with product identification, NSF listing marks, and footage counter marks. Other jacket colors available (some limitations may apply).

Part Number	Line Description	Max Bundle OD	Nominal ID	Nominal OD	Bend Radius	Clamp Size	Length
973-0004002X250	(4) 3/8" Bev-Seal Ultra 235 Tubes	3.0"	.380"	.500"	12"	14.0	250'
	(2) 3/8" LLDPE 221 Red/Blue Coolant Tubes		.380"	.500"		14.0	
973-0006002X250	(6) 3/8" Bev-Seal Ultra 235 Tubes	3.4"	.380"	.500"	14"	14.0	250'
	(2) 3/8" LLDPE 221 Red/Blue Coolant Tubes		.380"	.500"		14.0	
973-0008002X100	(8) 3/8" Bev-Seal Ultra 235 Tubes	3.5"	.380"	.500"	8"	14.0	100'
	(2) 3/8" LLDPE 221 Red/Blue Coolant Tubes		.380"	.500"		14.0	
973-0008002X150	(8) 3/8" Bev-Seal Ultra 235 Tubes	3.5"	.380"	.500"	8"	14.0	150'
	(2) 3/8" LLDPE 221 Red/Blue Coolant Tubes		.380"	.500"		14.0	
973-0008002X250	(8) 3/8" Bev-Seal Ultra 235 Tubes	3.5"	.380"	.500"	8"	14.0	250'
	(2) 3/8" LLDPE 221 Red/Blue Coolant Tubes		.380"	.500"		14.0	
973-0010004X150	(10) 3/8" Bev-Seal Ultra 235 Tubes	3.8"	.380"	.500"	12"	14.0	150'
	(4) 3/8" LLDPE 221 Red/Blue Coolant Tubes		.380"	.500"		14.0	
973-0010004X250	(10) 3/8" Bev-Seal Ultra 235 Tubes	3.8"	.380"	.500"	12"	14.0	250'
	(4) 3/8" LLDPE 221 Red/Blue Coolant Tubes		.380"	.500"		14.0	
973-0012004X150	(12) 3/8" Bev-Seal Ultra 235 Tubes	4.0"	.380"	.500"	12"	14.0	150'
	(4) 3/8" LLDPE 221 Red/Blue Coolant Tubes		.380"	.500"		14.0	
973-0012004X250	(12) 3/8" Bev-Seal Ultra 235 Tubes	4.0"	.380"	.500"	12"	14.0	250'
	(4) 3/8" LLDPE 221 Red/Blue Coolant Tubes		.380"	.500"		14.0	
973S0008002X150	(8) 5/16" Bev-Seal Ultra 235 Tubes	3.5"	.320"	.435"	12.3"	12.3	150'
	(2) 3/8" LLDPE 221 Red/Blue Coolant Tubes		.380"	.500"		14.0	
973S0010004X150	(10) 5/16" Bev-Seal Ultra 235 Tubes	3.8"	.320"	.435"	12.3"	12.3	150'
	(4) 3/8" LLDPE 221 Red/Blue Coolant Tubes		.380"	.500"		14.0	
973S0012004X150	(12) 5/16" Bev-Seal Ultra 235 Tubes	4.0"	.320"	.435"	12.3"	12.3	150'
	(4) 3/8" LLDPE 221 Red/Blue Coolant Tubes		.380"	.500"		14.0	



Numerous line labels are available. If you don't see what you need, please call us.



TUBING, FITTINGS & CLAMPS

NON-BARRIER POLY BEVERAGE TUBING

222-224 Series Bevlex® LLDPE Tubing is suitable for syrup or liquor service transfer, and is constructed of LLDPE (linear low density polyethylene) that offers resistance to stress cracking and UV light. Phthalate free.

Part Number	Nominal ID	Nominal OD	Length	Clamp Size	Marked Number
222-0440X500	.170"	.250"	500'	7.0	N/A
222-06622-00	.265"	.375"	500'	10.0	N/A
222-08620-00	.380"	.500"	500'	14.0	N/A
222-10620-00	.510"	.625"	500'	17.0	N/A
224-06620-XX	.265"	.375"	500'	10.0	1 - 10
224-08620-XX	.380"	.500"	500'	14.0	1 - 4

The 224 series also features optional numbering of 1-12.
Contact customer service for additional sizes and numbering.

221 Series LLDPE Low Density Industrial Grade Polyethylene Tubing is economical and lightweight, chemically inert and suitable for air and liquid transfer. It is resistant to sunlight and other forms of ultra-violet radiation, and provides excellent environmental stress crack resistance. Phthalate free.

Part Number	Nominal ID	Nominal OD	Length	Color
221-0862X500	.375"	.500"	500'	Black
2234-0862X500	.380"	.500"	500'	Red
2236-0862X500	.380"	.500"	500'	Blue
2234-1062X1K	.500"	.625"	1000'	Red
2236-1062X1K	.500"	.625"	1000'	Blue




500 Series Bevlex® white, non-PVC tubing for draft beer transfer and soft drink applications. Translucent tubing is free from colorants and up to 25% lighter weight than PVC. Special dual durometer TPE construction combines a clear low extraction inner contact surface with a flexible translucent outer layer, providing excellent kink resistance and taste protection properties. Excellent chemical resistance and no taste carryover when Standard Caustic Solution (2-3%) is utilized in line cleaning at the recommended temperatures of 80°-110°F. Phthalate free.

Part Number	Nominal ID	Nominal OD	Length	Bend Radius	Clamp Size
500-03125X100	3/16"	7/16"	100'	2.0"	12.3
500-04125X100	1/4"	1/2"	100'	3.0"	13.3
500-05125X100	5/16"	9/16"	100'	3.8"	15.7
500-06125X100	3/8"	.625"	100'	4.5"	17.0

PVC HOSE

K010 Food-Grade PVC Tubing is blue-tinted, crystal clear for easy flow monitoring, and has a glass smooth interior for minimal flow resistance. Tight dimensional tolerances makes it easy to get consistent fitting retention with standard fittings. Contact Customer Service for additional dimensions. Phthalate free.

Part Number	Nominal ID	Nominal OD	Length	Bend Radius	Clamp Size
K010-0204x100	1/8"	1/4"	100'		7.0
K010-0304x100	3/16"	1/4"	100'		7.0
K010-0305x100	3/16"	5/16"	100'		8.7
K010-0406x100	1/4"	3/8"	100'	3.5"	10.0
K010-0507x100	5/16"	7/16"	100'		12.3
K010-0610x100	3/8"	5/8"	100'	4.5"	17.0
K010-0810x100	1/2"	5/8"	100'	7.5"	17.0
K010-1014x100	5/8"	7/8"	100'	8.0"	22.6
K010-1216x100	3/4"	1"	100'	10.5"	27.1
K010-1418x100	7/8"	1 1/8"	100'		28.6
K010-1620x100	1"	1 1/4"	100'	12.0"	33.1

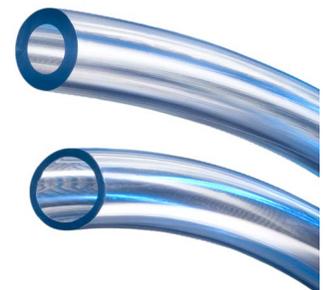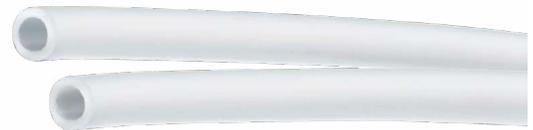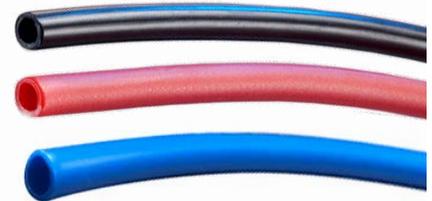



TUBING, FITTINGS & CLAMPS

PVC HOSE

K3130 and K3150 Series PVC Hose is clear and is reinforced with spiraled polyester yarn and a longitudinal blue or orange tracer yarn for identification. It is lightweight, silicone-free, non-conductive and resistant to chemicals. K3130 has a heavier wall than K3150. Contact Customer Service for additional dimensions. Phthalate free.

Part Number	Nominal ID	Nominal OD	Length	Bend Radius	Clamp Size
K3130-02x300	1/8"	.328"	300'		9.5
K3130-04x300	1/4"	.500"	300'		14.0
K3130-08x300	1/2"	.813"	300'		22.6
K3150-03x100	3/16"	.375"	100'	1.75"	10.0
K3150-03x300	3/16"	.375"	300'	1.75"	10.0
K3150-04x100	1/4"	.438"	100'	2.0"	12.3
K3150-04x300	1/4"	.438"	300'	2.0"	12.3
K3150-05x100	5/16"	.531"	100'	2.5"	14.5
K3150-05x300	5/16"	.531"	300'	2.5"	14.5
K3150-06x100	3/8"	.594"	100'	3.0"	15.7
K3150-06x300	3/8"	.594"	300'	3.0"	15.7
K3150-08x100	1/2"	.750"	100'	4.0"	19.8
K3150-08x300	1/2"	.750"	300'	4.0"	19.8
K3150-10x200	5/8"	.891"	200'	5.0"	23.5
K3150-16x200	1"	1.300"	200'	8.0"	33.1



200 Series Bevlex® PVC Beverage and Gas Tubing dual durometer construction combines low extraction inner contact surface with flexible outer layer for kink resistance and taste protection properties. Phthalate free.

200 Series Beverage Tubing

Part Number	Nominal ID	Nominal OD	Length	Bend Radius	Clamp Size	Application
200-0307x100	3/16"	7/16"	100'	2.0"	12.3	Clear Beverage Line
200-0307x500S	3/16"	7/16"	500'	2.0"	12.3	Clear Beverage Line
200-0408x100	1/4"	1/2"	100'	3.0"	13.3	Clear Beverage Line
200-0509x100	5/16"	9/16"	100'	3.7"	15.7	Clear Beverage Line
200-0609x100	3/8"	9/16"	100'	5.0"	15.7	Clear Beverage Line
200-0610x50	3/8"	5/8"	50'	4.5"	17.0	Clear Beverage Line
200-0610x100	3/8"	5/8"	100'	4.5"	17.0	Clear Beverage Line
200-0610x500	3/8"	5/8"	500'	4.5"	17.0	Clear Beverage Line
200-0812x100	1/2"	3/4"	100'		21.0	Clear Beverage Line



200 Series Gas Tubing

Part Number	Nominal ID	Nominal OD	Length	Bend Radius	Clamp Size	Application
203-0307X100	3/16"	7/16"	100'	2.0"	12.3	Black, CO2 Supply Line
203-0610X100	3/8"	5/8"	100'	4.5"	17.0	Black, CO2 Supply Line
204-0509X100	5/16"	9/16"	100'	3.7"	15.7	Red, Air Supply Line
204-0509X500	5/16"	9/16"	500'	3.7"	15.7	Red, Air Supply Line
209D-0509X100S	5/16"	9/16"	100'		15.7	Blue Translucent, Air Supply Line
209D-0509X500S	5/16"	9/16"	500'		15.7	Blue Translucent, Air Supply Line
209R-0509X100S	5/16"	9/16"	100'		15.7	Red Translucent, Air Supply Line
209R-0509X500S	5/16"	9/16"	500'		15.7	Red Translucent, Air Supply Line



TUBING, FITTINGS & CLAMPS

DRAIN TUBING

213 & 215 Series PVC Drain Tubing industrial grade tubing is constructed to provide lightweight flexibility, kink-resistance and economy. 213 Series tubing is black, 213B is blue, and 215 Series tubing is gray. Green 213 series tubing are available upon special request. Phthalate free.

Part Number	Nominal ID	Nominal OD	Length	Bend Radius	Clamp Size
213-08120-00	1/2"	3/4"	100'	6.0"	19.8
213-10140-00	5/8"	7/8"	100'	8.0"	22.6
213-12160-00	3/4"	1"	100'	10.5"	27.1
213B-1216x100	3/4"	1"	100'	10.5"	27.1
213-16200-00	1"	1-1/4"	100'	12.0"	33.1
215-08120-00	1/2"	3/4"	100'	6.0"	19.8
215-10140-00	5/8"	7/8"	100'	8.0"	22.6
215-12160-00	3/4"	1"	100'	10.5"	27.1



218 Series Sani-Clean AM™ has a special proprietary compound incorporating an EPA-listed anti-microbial additive which discourages the development of fungal growth on the inner and outer tubing surfaces. The tubing's unique translucent metallic gray color gives it a sanitary appearance, while still allowing a visual inspection of the line while in service. Phthalate free.

Part Number	Nominal ID	Nominal OD	Length	Bend Radius	Clamp Size
218-0812x100	1/2"	3/4"	100'	6.0"	19.8
218-1014x100	5/8"	7/8"	100'	8.0"	22.6
218-1216x100	3/4"	1"	100'	9.0"	27.1
218-1418x100	7/8"	1-1/8"	100'	10.5"	28.6
218-1620x100	1"	1-1/4"	100'	12.0"	33.1



Tigerflex Series Drain Tubing is suitable for drains on ice makers and beverage dispensing units. It is constructed from smooth bore flexible PVC with rigid PVC helix reinforcement. It features optional antimicrobial insulation to reduce bacterial growth and minimize condensation. Phthalate free.

Part Number	Nominal ID	Nominal OD	Length	Bend Radius	Type
DHG05MMX100	1/2"	.67"	100'	.50"	Non-Insulated
DHG20MX100	3/4"	1.06"	100'	.75"	Non-Insulated
DHG27MMX100	1"	1.36"	100'	1.0"	Non-Insulated
A15-DHG20MM	3/4"	1.06"	6'	.75"	Insulated
A15-DHG27MM	1"	1.36"	6'	1.0"	Insulated



DRAIN FIXTURE

TRU-GAP

Part Number	Description
925340	Tru-Gap PVC Air Gap Fixture with SS Hardware, Install Up To Three Drain Lines To One Tru-Gap Fixture, Connects To a Standard 2" PVC Pipe, With Reducer Can Be Adapted To Smaller Or Larger Pipes



[925340 Kit](#)

[925340 Assembled](#)



TUBING, FITTINGS & CLAMPS

CO2 HOSE

180 Series Reinforced Bevlex® Plus hoses are ideal for pressure lines, while providing good crushing and kink resistance. It is constructed with a Glas-Flex™ (PET) liner, polyester yarn reinforcement, and an opaque EVA silver on black jacket which prevents transmission of light including UV radiation through the hose wall. It is recommended for use on filtered water and carbonated water lines where algae growth can be a concern, assuring excellent taste protection properties and pressure performance. Phthalate free.

Part Number	Nominal ID	Nominal OD	Length	Bend Radius	Clamp Size
180-04100-SIL	.265"	.457"	100'	1.25"	13.3
180-04500-SIL	.265"	.457"	500'	1.25"	13.3
180-06100-SIL	.375"	.593"	100'	2.00"	15.7
180-06300-SIL	.375"	.593"	300'	2.00"	15.7
180-08100-SIL	.510"	.740"	100'	3.50"	19.8
180-08300-SIL	.510"	.740"	300'	3.50"	19.8



176 Series Bev-Seal® CO2 Barrier Protected – UV Resistant CO2 Supply Hose is ideal for pressure regulated CO2 supply lines up to 300 PSI WP @ RT based on minimum burst of 1200 PSI. Proprietary barrier protected core tube design resists permeation of the CO2 gas, while at the same time protecting the gas from ingress of external contaminants. Unique Duo-Ex WHITE over BLACK outer jacket provides superior UV resistance and outdoor service life. Thicker wall construction provides superior bend radius and kink resistance; will bend without cracking at -109°F (-78°C). It is recommended for supplying regulated CO2 gas to carbonators for carbonated beverage and beer dispensing. Phthalate free.

Part Number	Nominal ID	Nominal OD	Length	Bend Radius	Clamp Size
176-04502-00	.265"	.457"	500'	1.25"	13.3
176-06302-00	.380"	.593"	300'	2.0"	15.7



3768 Series High Pressure Liquid CO2 Barrier Transfer Hose multi-layer extrusion has a high tensile strength with an integral barrier food grade layer is ideal for bulk liquid CO2. The hose has a use temperature range of -109°F to +150°F (-78°C to +65°C). It is smooth, seamless, and fully bonded to the reinforcement layer. Use PHP fittings.


Part Number	Nominal ID	Nominal OD	Length	Bend Radius
3768-08X600	.503"	.834"	600'	5.0"



176V Series Low Temperature CO2 Vent Hose – Yarn Reinforced, Blue Weather Resistant Jacket

is a flexible low temperature hose, designed for use with barbed inserts and stepless pinch clamps to vent excess carbon dioxide gas from adequately regulated relief valve on bulk storage systems. Blue over black jacket is weather and UV-resistant. Maximum 300 PSIG WP @ 70°F. Minimum 1200 PSIG BURST @ 70°F. Service temperature range -109.3°F (-78°C) to +140°F (+60°C).


Part Number	Nominal ID	Nominal OD	Length	Clamp Size
176V-06300-BL	.375"	.589"	300'	15.7
176V-08300-BL	.500"	.740"	300'	19.8

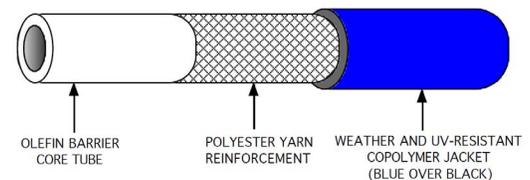

1413 Series Low Temperature CO2 Vent Hose – Yarn Reinforced, Black Weather Resistant Jacket

is designed for use with compression and push-to-lock fittings to vent excess CO2 gas from bulk storage systems. Maximum 300 PSIG WP @ 70°F. Minimum 1200 PSIG BURST @ 70°F. Service temperature range -109.3°F (-78°C) to +200°F (+93°C)

Part Number	Nominal ID	Nominal OD	Length
1413-08X500	.375"	.500"	500'

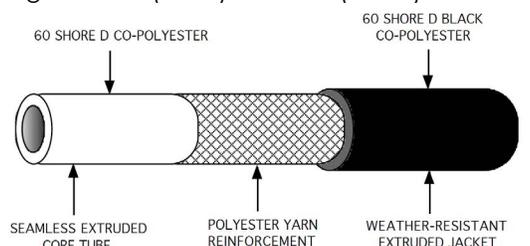



TUBING, FITTINGS & CLAMPS

ZIP TIES



Part Number	Description
AL-MP-1000-9-C	Natural, 1" Mounting Base, Rubber Adhesive
TRS-BK	Black, 4", Standard
08436-1	Natural, 7", Standard
08484-1	Natural, 7", Standard with Mounting Hole
400145	Black, 7", Standard
AL-11-50-9-C	Natural, 11", Standard
08427-1	Natural, 14", Standard
AL-14-50-MG-9-C	Natural, 14", Standard with Mounting Hole
10038-0	Natural, 14", Heavy Duty
10035-0	Natural, 14", Heavy Duty with Mounting Hole
435804	Black, 14", Standard
AL-14-120-0-C	Black, 14", Heavy Duty
435805	Black, 14", Heavy Duty with Mounting Hole
AL-24-175-9-L	Natural, 24", Standard

ARMAFLEX INSULATION

Part Number	ID	Wall	Box Quantity
ABAA0038014	3/8"	1/4"	804'
ABAA0012014	1/2"	1/4"	576'
ABAA0012038	1/2"	3/8"	480'
ABAA0058012	5/8"	1/2"	300'
ABAA0078012	7/8"	1/2"	210'
ABAA0118012	1-1/8"	1/2"	150'
ABAA0138038	1-3/8"	3/8"	180'
ABAA0158034	1-5/8"	3/4"	60'
ABAA0218012	2-1/8"	1/2"	60'
ABAA0278012	2-7/8"	1/2"	48'
ABAA0278034	2-7/8"	3/4"	42'

TUBING TOOLS

Part Number	Description
951-01000-01	Bundle Tubing Slicer
959-01000-00	Kuri Snip Cutter, up to 1/2"
959-03000-00	Replacement Blade for 959-01000-00
T04-0004	Tubing Cutter, Plastic Silver
T04-0005	Replacement Blades for T04-0004, 5/pk
958-01000-00	Medium Bundle Cutter, up to 1-5/8"
958-03000-00	Replacement Blade for 958-01000-00
954-01000-00	Large Bundle Cutter, up to 1-7/8"
954-03000-00	Replacement Blade for 954-01000-00
957-01000-00	Jumbo Bundle Cutter, up to 2-1/2"
957-03000-00	Replacement Blade for 957-01000-00
T04-0001	Side Jaw Pincers
T04-0002	Jaw Standard Pincers
29	Vice Grip Pinch-Off Tool
HLFT	Food Grade Lubricant 4 Oz Tube
104S	Silicone Grease 1 Oz Tube



Sold in 6' Sections



[959-01000-00](#)
Kuri Snip Cutter
(up to 1/2")



[958-01000-00](#)
Medium Bundle Cutter
(up to 1-5/8")



[954-01000-00](#)
Large Bundle Cutter
(up to 1-7/8")



[29](#)
Vice Grip
Pinch-Off Tool



[T01-0004](#)



[HFZF001](#)



[T01-0004](#)



[951-01000-01](#)
Bundle Tubing Slicer



[T04-0004](#)
Tubing/Hose Cutter



[957-01000-00](#)
Jumbo Bundle Cutter
(up to 2-1/2")



[T04-0001](#)
Side Jaw Pincers



[T04-0002](#)
Standard Jaw Pincers



[HLFT](#)
Food Grade Lubricant



[104S](#)
Silicone Grease

TAPE

Part Number	Description
4219-12	Insulation Tape, Self-Adhesive, 2" x 30'
5029545	Black PVC Tape, 3" x 60'
T01-0004	Foam Insulation Tape, Self-Adhesive, 2" x 33'
HFZE005	Cork Insulation Tape, 2" x 30'
00211684	Aluminum Foil Tape, 2" x 30'
HFZF001	Armaflex Insulation Tape & Dispenser, 2" x 30'
T01-0001	Teflon Tape, 1/2" x 21'
T01-0002	Black Electrical Tape, 3/4" x 66'
T01-0003	Aluminum Foil Duct Tape, 2" x 150'
29-0316-00	Black Cloth Duct Tape, 2" x 180'